



Level



Pressure



Flow



Temperature

Liquid
Analysis

Registration

Systems
Components

Services



Solutions

Technical Information

Liquisys M COM223/253

Dissolved Oxygen Measurement Transmitter for oxygen sensors



Application

The modular design of the transmitter allows easy adaption to a variety of customer requirements. Starting with the basic version for "measurement and alarm generation", the transmitter can be equipped with additional software and hardware modules for special applications. These modules can also be retrofitted as required.

Areas of Application

- Sewage treatment plants
- Wastewater treatment
- Water treatment
- Drinking water
- Surface water: rivers, lakes, sea
- Fish farming
- Boiler feed water (trace measurement)

Your benefits

- Field or panel-mounted housing
- Universal application
- For analogue and digital sensors
- Simple handling
 - Logically arranged menu structure
 - Simple single-point calibration in air, air-saturated water or in the medium is possible
- Safe operation
 - Excellent interference immunity
 - Direct access for manual contact control
 - User-defined alarm configuration

The basic unit can be extended with:

- 2 or 4 additional contacts for use as:
 - Limit contacts (also for temperature)
 - P(ID) controller
 - Timer for simple rinse processes
 - Complete cleaning with Chemoclean
- Plus package:
 - User-defined current output characteristics
 - Automatic cleaning trigger on alarm or limit violation
 - Process monitoring
 - Sensor live check
- HART or PROFIBUS-PA/-DP
- 2nd current output for temperature, main measured value or actuating variable
- Current input for flow rate monitoring with controller shut off or for feedforward control

Function and system design

Features of the basic version	Measurement of oxygen content and of partial oxygen pressure The oxygen content is displayed in mg/l or in %SAT, the partial oxygen pressure is displayed in hPa. This is selected via the menu. The temperature is displayed at the same time or, if desired, not shown at all. Calibration The amperometric sensors are zero-current-free and only require a single-point calibration. This takes place in air, air-saturated water or by reference calibration in the medium. The optical sensor will be calibrated before shipment. If necessary it can be calibrated in air and for zero point. Configuration Different alarms are required depending on application and operator. Therefore the transmitter permits independent configuration of the alarm contact and error current for each individual error. Unnecessary or undesirable alarms can be suppressed in this manner. Up to four contacts can be used as limit contacts (also for temperature), to implement a P(ID) controller or for cleaning functions. Direct manual operation of the contacts (bypassing the menu) provides quick access to limit, control or cleaning contacts, permitting speedy correction of deviations. The serial numbers of the instrument and modules and the order code can be called up on the display.
Additional functions of version WX/WS/DS	Automatic pressure compensation Oxygen concentration is not only dependent on altitude but also on weather conditions (pressure). Automatic pressure compensation takes these fluctuations into account.
Additional functions of the Plus package	Current output configuration In order to output wide measuring ranges while still achieving a high resolution in specific ranges, the current output can be configured as required via a table. This permits bilinear or quasi-logarithmic curves, etc. Process Check System (PCS) It comprises two independent safety functions: ■ Errors in applications without control are detected by monitoring the limit between plausible and implausible measured values, i.e. the alarm threshold. ■ Errors in applications with control are detected by the controller monitor which monitors freely adjustable, maximum permissible time intervals and reference value overshoot or undershoot. Live check, sensor activity monitoring The live check issues an alarm when the sensor signal does not change over a defined period of time. This may be caused by blocking, passivation, separation from the process, etc.
Second current output	The second current output can be configured for temperature, main measured value (oxygen content, partial oxygen pressure) or actuating variable.
Current input	The current input of the transmitter allows two different applications: controller shut-down in case of lower flow rate violation or total failure in the main flow as well as feedforward control. Both functions are also combinable.

Measuring system

A complete measuring system comprises:

Variant 1 (DX/DS with COS41)


- The transmitter Liquisys M COM223 or COM253 in version DX or DS
- An oxygen sensor COS41
- An immersion, flow or retractable assembly

Options: extension cable CMK, junction box VBM

Variant 2 (WX/WS with COS31, COS61 or COS71)

- The transmitter Liquisys M COM223 or COM253 in version WX or WS
- An oxygen sensor COS31, COS61 or COS71
- An immersion, flow or retractable assembly

Options: extension cable OMK, junction box VS

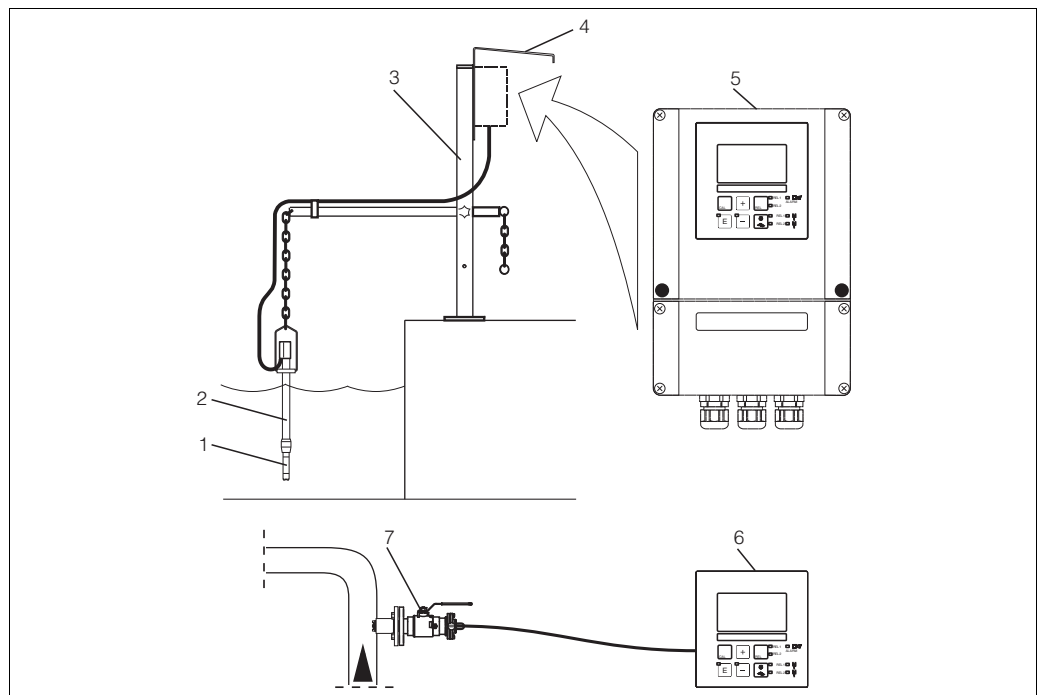

C07-COM2x3xx-14-06-00-xx-002.eps

Complete measuring system Liquisys M COM223/253

- | | |
|-----------------------------------|-------------------------------|
| 1 Oxygen sensor | 5 Liquisys M COM253 |
| 2 Immersion assembly CYA112 | 6 Liquisys M COM223 |
| 3 Holder CYH112 | 7 Retractable assembly COA451 |
| 4 Weather protection cover CYY101 | |

Input

Measured variables	Oxygen Temperature	
Measuring range	COS31: Oxygen concentration 0 ... 20 / 0 ... 60 mg/l Oxygen saturation index 0 ... 200 / 0 ... 600 % SAT Oxygen partial pressure 0 ... 400 / 0 ... 1200 hPa COS41, COS61: Oxygen concentration 0 ... 20 mg/l Oxygen saturation index 0 ... 200 % SAT Oxygen partial pressure 0 ... 400 hPa COS71: Oxygen concentration 0 ... 20 mg/l Oxygen saturation index 0 ... 200 % SAT Oxygen partial pressure 0 ... 400 hPa Temperature: -10 ... 60 °C (14 ... 140 °F)	
Cable specification	Cable length: COS31, COS61, COS71 max. 100 m (328 ft) COS41 max. 50 m (164 ft)	
O₂ signal input	Version DX/DS:	0 ... 3000 nA
	Version WX/WS:	digital communication or 0 ... -7500 mV
Binary inputs	Voltage:	10 to 50 V
	Power consumption:	max. 10 mA
Current input	4 to 20 mA, galvanically separated Load: 260 Ω at 20 mA (voltage drop 5.2 V)	

Output

Output signal 0/4 to 20 mA, galvanically separated, active

HART	
Signal coding	Frequency Shift Keying (FSK) + 0.5 mA via current output signal
Data transfer rate	1200 Baud
Galvanic isolation	yes

PROFIBUS PA	
Signal coding	Manchester Bus Powered (MBP)
Data transfer rate	31.25 kBit/s, voltage mode
Galvanic isolation	yes (IO-Module)

PROFIBUS DP	
Signal coding	RS485
Data transfer rate	9.6 kBd, 19.2 kBd, 93.75 kBd, 187.5 kBd, 500 kBd, 1.5 MBd
Galvanic isolation	yes (IO-Module)

Signal on alarm	2.4 or 22 mA in case of an error	
Load	maximum 500 Ω	
Transmission range	COS31: Oxygen concentration Δ 0.2 ... Δ 20 / Δ 0.6 ... Δ 60 mg/l Oxygen saturation index Δ 2 ... Δ 200 / Δ 6 ... Δ 600 % SAT Oxygen partial pressure Δ 4 ... Δ 400 / Δ 12 ... Δ 1200 hPa COS41, COS61: Oxygen concentration Δ 0.2 ... Δ 20 mg/l Oxygen saturation index Δ 2 ... Δ 200 % SAT Oxygen partial pressure Δ 4 ... Δ 400 hPa COS71: Oxygen concentration Δ 0.02 ... Δ 20 mg/l Oxygen saturation index Δ 0.2 ... Δ 200 % SAT Oxygen partial pressure Δ 0.4 ... Δ 400 hPa Temperature: Δ 7 ... Δ 70 °C	
Resolution	max. 700 digits/mA	
Isolation voltage	max. 350 V _{RMS} /500 V DC	
Overvoltage protection	according to EN 61000-4-5	
Auxiliary voltage output	Output voltage:	15 V $\pm$ 0.6
	Output current:	max. 10 mA
Contact outputs	Switching current with ohmic load (cos φ = 1):	max. 2 A
	Switching current with inductive load (cos φ = 0.4):	max. 2 A
	Switching voltage:	max. 250 V AC, 30 V DC
	Switching power with ohmic load (cos φ = 1):	max. 500 VA AC, 60 W DC
	Switching power with inductive load (cos φ = 0.4):	max. 500 VA AC, 60 W DC
Limit contactor	Pickup/dropout delay:	0 to 2000 s
Controller	Function (adjustable):	pulse length/pulse frequency controller
	Controller response:	PID
	Control gain K _p :	0.01 to 20.00
	Integral action time T _i :	0.0 to 999.9 min
	Derivative action time T _v :	0.0 to 999.9 min
	Period for pulse length controller:	0.5 to 999.9 s
	Frequency for pulse frequency controller:	60 to 180 min ⁻¹
	Basic load:	0 to 40% of max. set value
Alarm	Function (switchable):	latching/momentary contact
	Alarm threshold adjustment range:	O ₂ / temperature: entire measuring range, depending on sensor type
	Alarm delay:	0 ... 2000 s (min)
	Monitoring time lower limit violation:	0 ... 2000 min
	Monitoring time upper limit violation:	0 ... 2000 min

Protocol specific data


HART	
Manufacturer ID	11 _h
Device type code	0094 _h
Transmitter specific revision	0001 _h
HART specification	5.0
DD files	www.products.endress.com/profibus
Load HART	250 Ω
Device variables	None (dynamic variables PV, SV, only)
Features supported	–

PROFIBUS PA	
Manufacturer ID	11 _h
Ident number	1518 _h
Device revision	11 _h
Profile version	2.0
GSD files	www.products.endress.com/profibus
GSD file version	
Output values	Main value, temperature value
Input values	Display value of PLC
Features supported	Device locking: The device can be locked by hardware or software.

PROFIBUS DP	
Manufacturer ID	11 _h
Ident number	151E _h
Profile version	2.0
GSD files	www.products.endress.com/profibus
GSD file version	
Output values	Main value, temperature value
Input values	Display value of PLC
Features supported	Device locking: The device can be locked by hardware or software.

Power supply

Electrical connection COM2x3-DX/DS

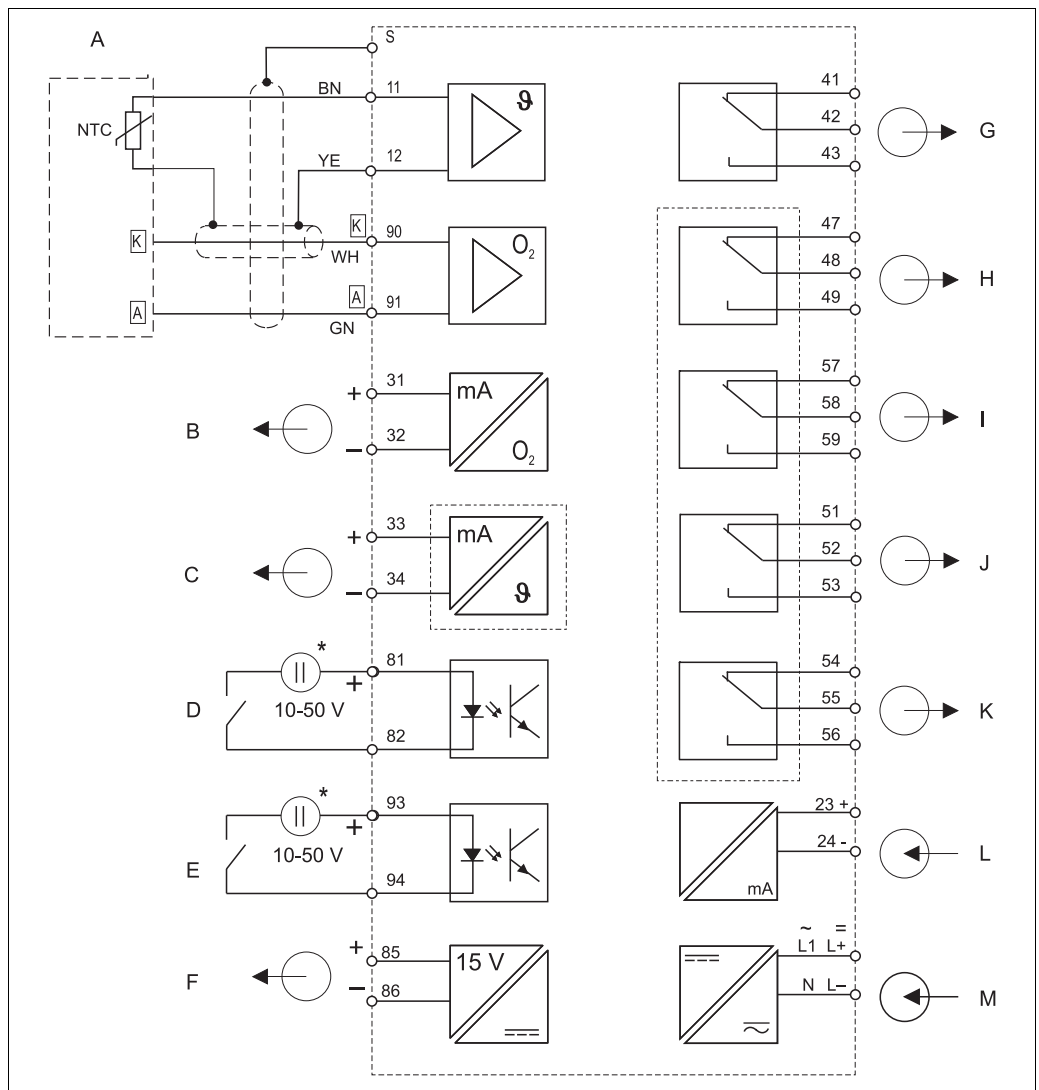

Electrical connection version DX or DS


- A Sensor COS41
 B Signal output 1 oxygen
 C Signal output 2 temperature
 D Binary input 1 (Hold)
 E Binary input 2 (Chemoclean)
 F Aux. voltage output

* Aux. voltage output terminal 85/86 applicable

- G Alarm (current-free contact position)
 H Relay 1 (current-free contact position)
 I Relay 2 (current-free contact position)
 J Relay 3 (current-free contact position)
 K Relay 4 (current-free contact position)
 L Current input 4 ... 20 mA
 M Power supply

The device is approved for protection class II and is generally operated without a protective earth connection.

Electrical connection COM2x3-WX/WS¹⁾

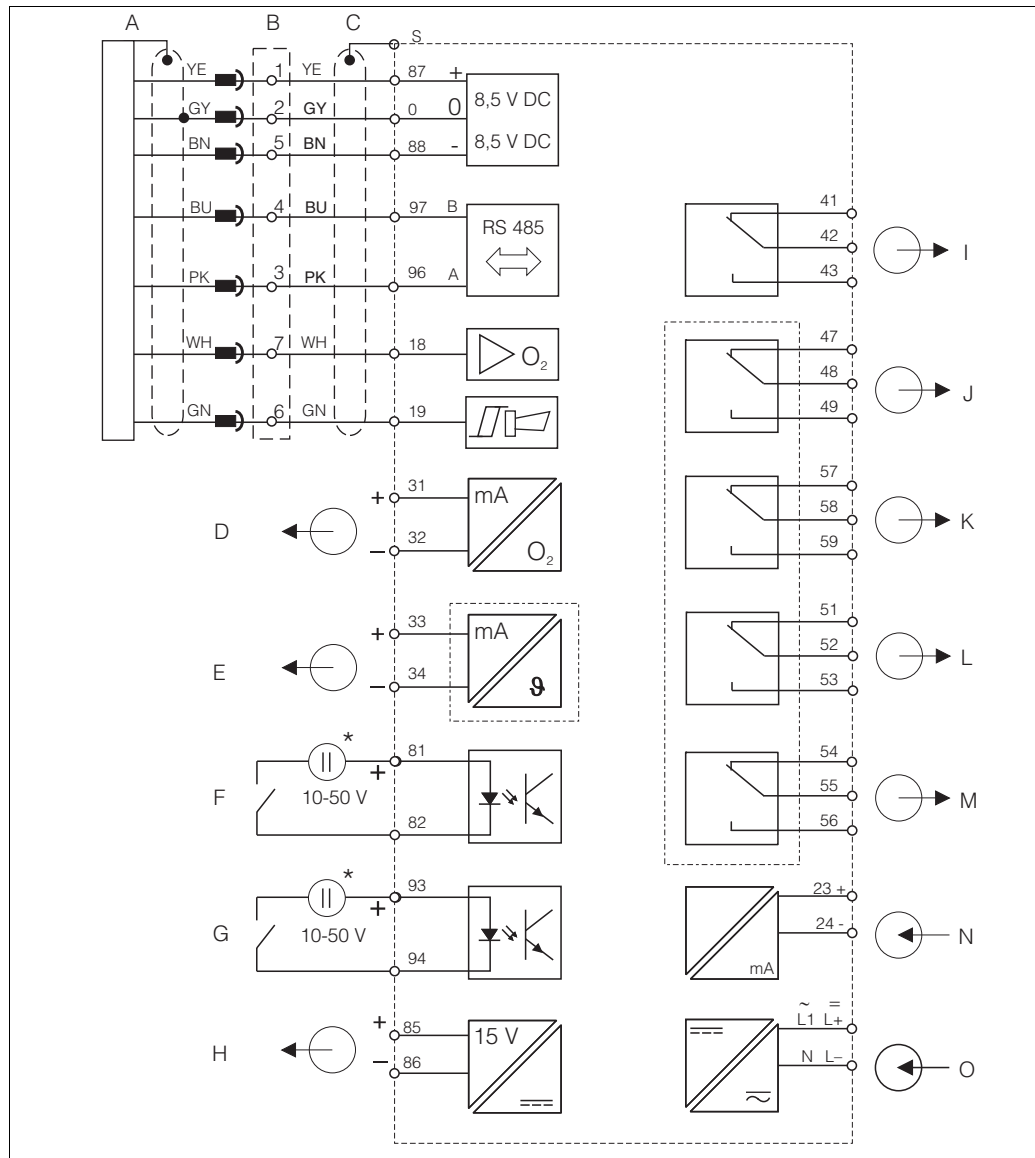

C07-COM2x3-WX-04-06-00-xx-003.eps

Electrical connection version WX/WS

A Oxygen sensor COS31/61/71

B Junction box VS with extension

C COM253: Plug connection for oxygen sensor

COM223: The sensor cable plug must be removed or L junction box VS used

D Signal output 1 oxygen

E Signal output 2 temperature

F Binary input 1 (Hold)

G Binary input 2 (Chemoclean)

H Aux. voltage output

I Alarm (current-free contact position)

J Relay 1 (current-free contact position)

K Relay 2 (current-free contact position)

L Relay 3 (current-free contact position)

M Relay 4 (current-free contact position)

N Current input 4 ... 20 mA

O Power supply

* Aux. voltage output terminal 85/86 applicable

The device is approved for protection class II and is generally operated without a protective earth connection.


Note!

The signals "Sensor signal" and "Alarm" are not used by COS61 and the TOP68-versions.


1) COS61 sensors from serial no. 79xxxx

Sensor cable

The oxygen sensors are supplied with the measuring cable. To extend this cable, you have to use a junction box and an extension cable (see "Accessories").

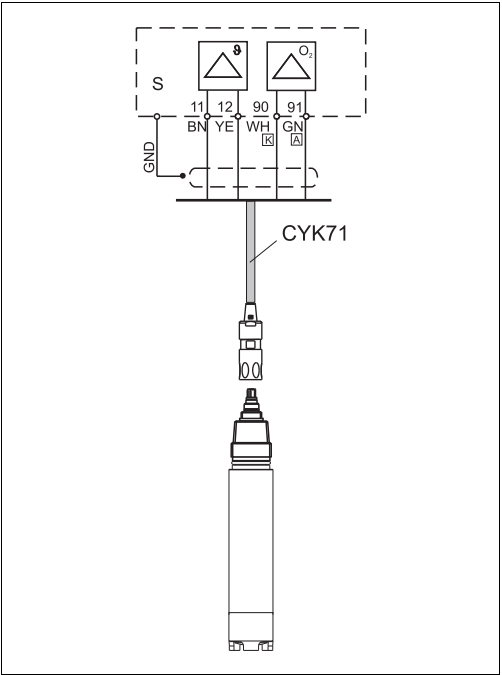

COS41 to COM2x3-DX/DS with CYK71 cable

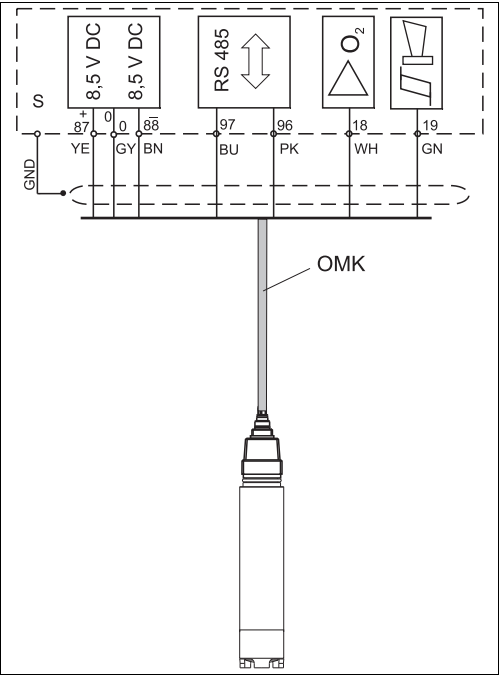

COS31/61¹⁾/71 to COM2x3-WX/WS

1) from serial no. 79xxxx

Supply voltage

Depending on ordered version:
100/115/230 V AC +10/-15 %, 48 to 62 Hz
24 V AC/DC +20/-15 %

Fieldbus connection

HART	
Supply voltage	n/a, active current outputs
Integrated reverse voltage protection	n/a, active current outputs

PROFIBUS PA	
Supply voltage	9 V to 32 V, max. 35 V
Polarity sensitive	no
FISCO/FNICO compliant acc. to IEC 60079-27	no

PROFIBUS DP	
Supply voltage	9 V to 32 V, max. 35 V
Polarity sensitive	n/a
FISCO/FNICO compliant acc. to IEC 60079-27	no

Power consumption

max. 7.5 VA

Mains protection

Fine-wire fuse, medium-slow blow 250 V/3.15 A


Performance characteristics

Resolution	Oxygen:	
	COS31, COS41, COS61:	0.01 mg/l / 0.1 % SAT / 1 hPa
	COS71:	0.001 mg/l / 0.1 % SAT / 1 hPa
	Temperature:	0.1 °C
Maximum measured error²⁾	Display	
	Oxygen:	max. 0.5 % of measuring range
	Temperature:	max. 1.0 % of measuring range
	Signal output	
	Oxygen:	max. 0.75 % of measuring range
	Temperature:	max. 1.25 % of measuring range
Repeatability^a	max. 0.2 % of measuring range	
Temperature compensation range	0 ... 50 °C (32 ... 104 °F)	
Pressure compensation range	500 ... 1100 hPa	
Altitude adjustment range	0 ... 4000 m (0 ... 13124 ft)	
Salinity adjustment range	0 ... 4 ‰	
Slope adjustment range	COS31:	75 ... 140 % (nominal 290 nA, in air, 20 °C (68 °F), 1013 hPa)
	COS41:	75 ... 140 % (nominal 290 nA, in air, 20 °C (68 °F), 1013 hPa)
	COS61:	75 ... 140 % (nominal 1340 nA, in air, 20 °C (68 °F), 1013 hPa)
	COS71:	50 ... 150 % (nominal 8000 nA, in air, 20 °C (68 °F), 1013 hPa)


2) acc. to IEC 746-1, for nominal operating conditions

Installation

Installation instructions

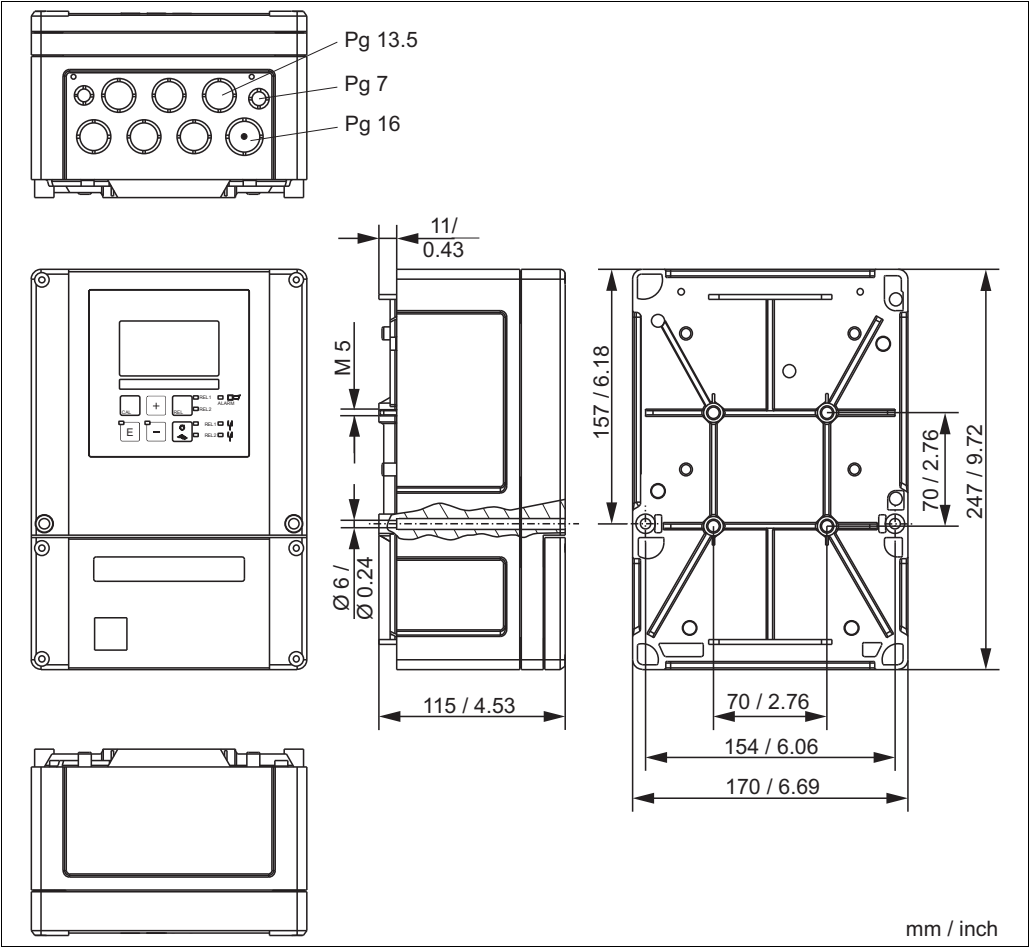


Field instrument

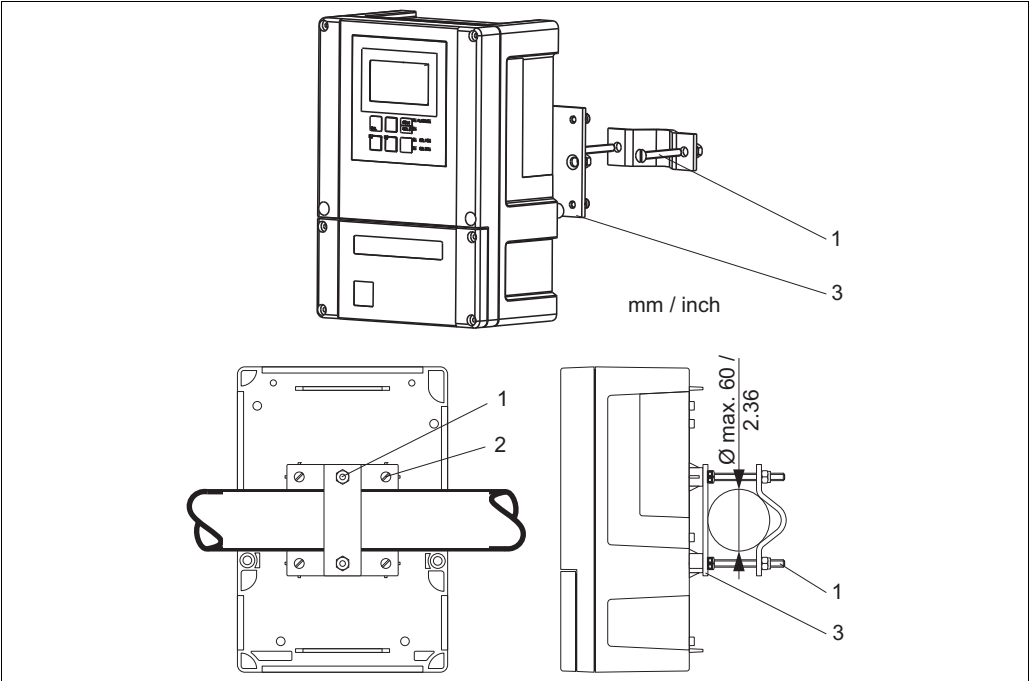


Mounting on pipes

1 - 3 Mounting screws and mounting plate

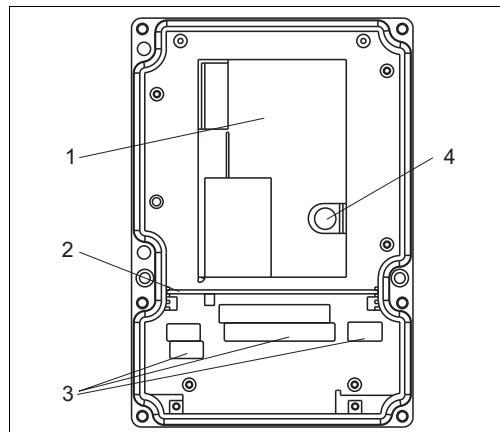

a0005734


View into the field instrument

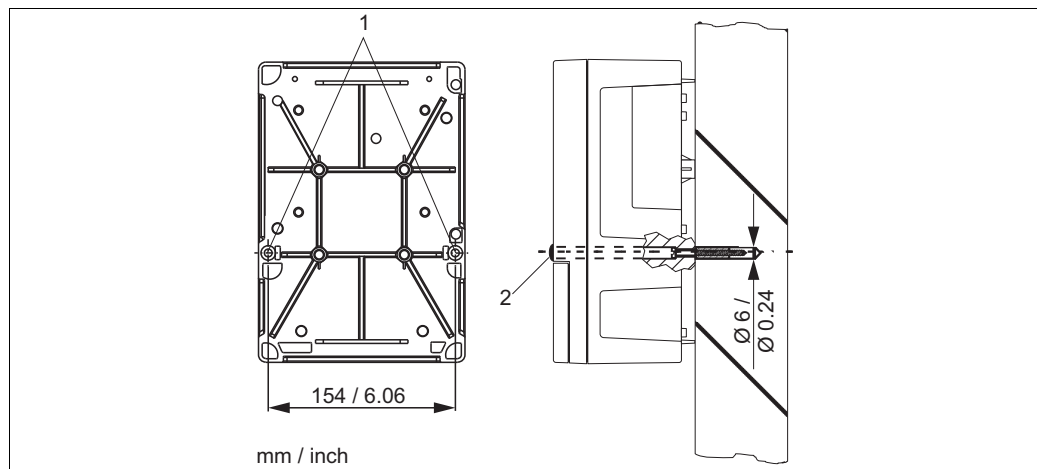

a0005736

Wall mounting of the field instrument


- 1 Mounting holes
- 2 Protecting cap

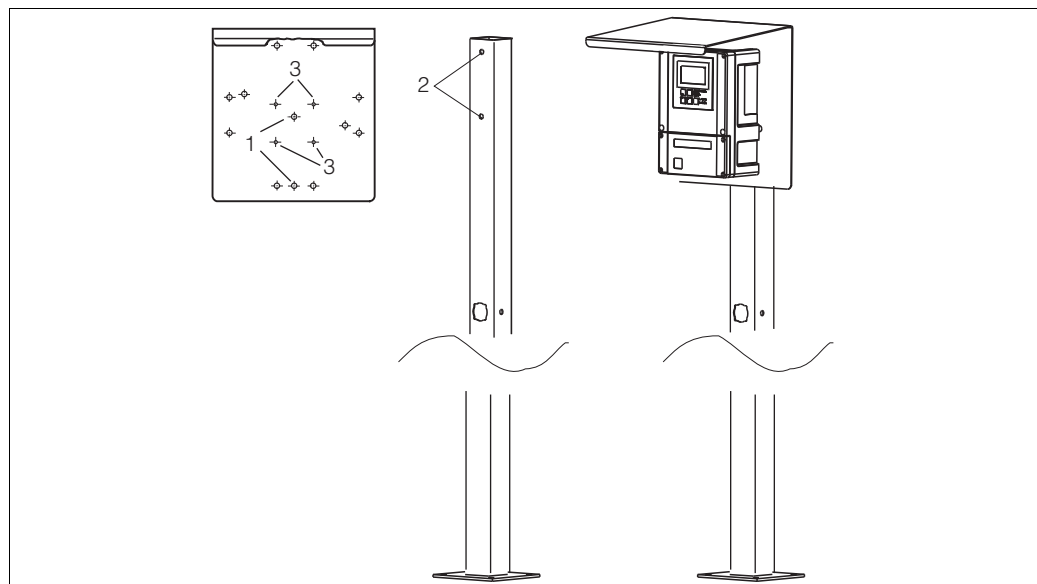

a0005738


Mounting of the field instrument with mounting post and weather protection cover

- 1 - 3 Mounting holes

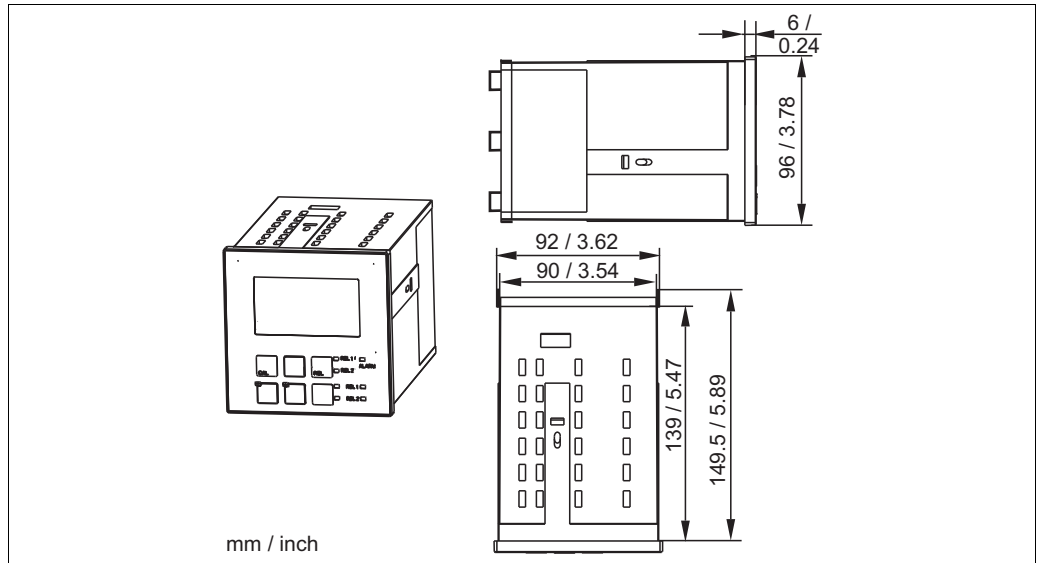

Dimensions panel-mounted instrument

a0005735

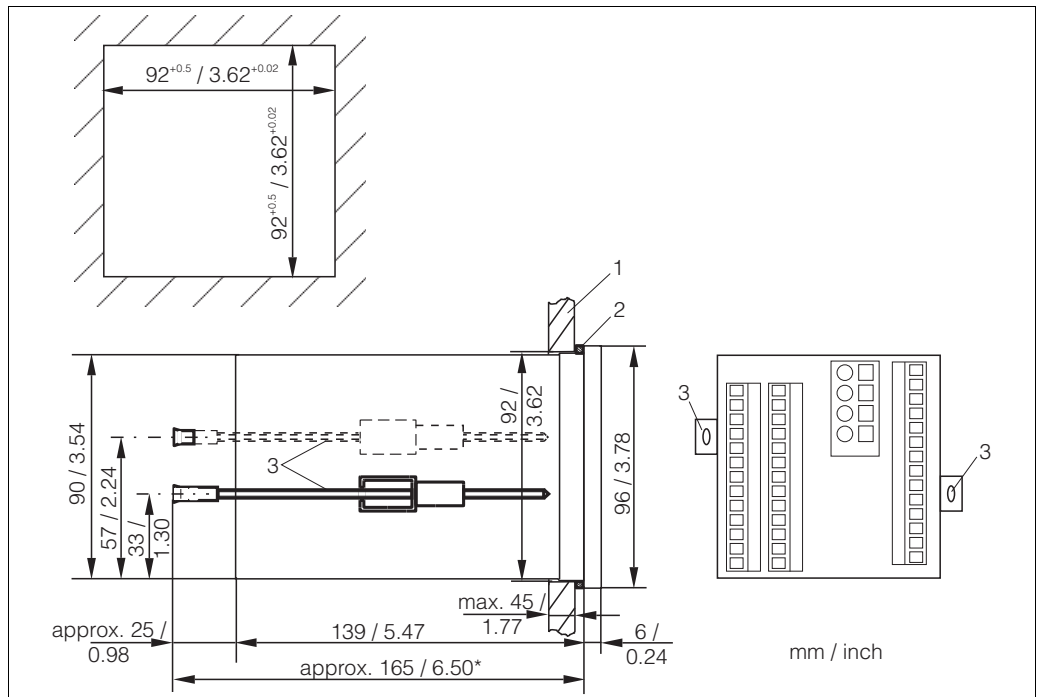

Installation of the panel-mounted instrument

- 1 Wall of control cabinet
- 2 Gasket
- 3 Tensioning screws
- * Required installation depth

a0005739

Environment

Ambient temperature	-10 to +55 °C (+14 to +131 °F)	
Storage temperature	-25 to +65 °C (-13 to +149 °F)	
Electromagnetic compatibility	Interference emission and interference immunity as per EN 61326-1:2006, EN 61326-2-3:2006	
Ingress protection	Panel mounted instrument: Field instrument:	IP 54 (front), IP 30 (housing) IP 65 / tightness acc. to NEMA 4X
Electrical safety	according EN/IEC 61010-1:2001, Installation Category II, for use up to 2000 m above sea level	
CSA	Apparatus with CSA General Purpose Approval are certified for indoor use.	
Relative humidity	10 to 95%, non-condensing	
Pollution degree	The product is suitable for pollution degree 2.	


Mechanical construction

Dimensions	Panel mounted instrument: Field instrument:	96 x 96 x 145 mm (3.78 x 3.78 x 5.71 inches) Installation depth: approx. 165 mm (6.50") 247 x 170 x 115 mm (9.72 x 6.69 x 4.53 inches)
Weight	Panel mounted instrument: Field instrument:	max. 0.7 kg (1.5 lb) max. 2.3 kg (5.1 lb)
Materials	Housing of panel mounted instrument: Field housing: Front membrane:	Polycarbonate ABS PC Fr Polyester, UV-resistant
Terminals	Cross section	max. 2.5 mm ²

Operability

Operating concept	All instrument control functions are arranged in a logical menu structure. Following access code entry, the individual parameters can be easily selected and modified as needed.
--------------------------	--

Display elements

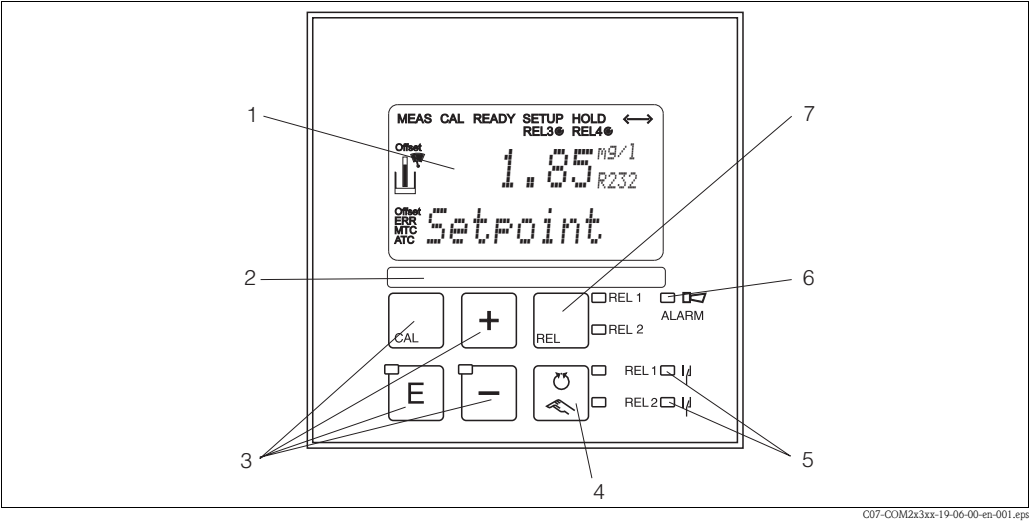

Operating elements

The display simultaneously shows the current measured value and the temperature - the essential process data. Brief information texts in the configuration menu provide assistance with parameter configuration.

Certificates and approvals

CE symbol	Declaration of conformity The product meets the requirements of the harmonized European standards. It thus complies with the legal requirements of the EC directives. The manufacturer confirms successful testing of the product by affixing the CE symbol.
CSA General purpose	C.M2.3-..2... C.M2.3-..3... C.M2.3-..7...

Ordering information

Product structure

Input, software version		
DX	Sensor COS41 / 4 / 4HD, basic functions	
DS	Sensor COS41 / 4 / 4HD, with additional functions (Plus package)	
WX	Sensor COS31 / 61 / 71 / 3 / 3HD, basic functions	
WS	Sensor COS31 / 61 / 71 / 3 / 3HD, with additional functions (Plus package)	
Power supply, approval		
0	230 V AC	
1	115 V AC	
2	230 V AC; CSA Gen. Purp.	
3	115 V AC; CSA Gen. Purp.	
5	100 V AC	
7	24 V AC/DC; CSA Gen. Purp.	
8	24 V AC/DC	
Output		
0	1 x 20 mA, primary value	
1	2 x 20 mA, primary value + secondary value	
3	PROFIBUS PA	
4	PROFIBUS DP	
5	1 x 20 mA, primary value, HART	
6	2 x 20 mA, primary value, HART + secondary value	
Additional contacts		
05	not selected	
10	2 relays (limit/P(ID)/timer)	
15	4 relays (limit/P(ID)/Chemoclean) (not with PROFIBUS DP)	
16	4 relays (limit/P(ID)/timer) (not with PROFIBUS DP)	
20	1 x 4 ... 20 mA input + 2 relays (limit/P(ID)/timer)	
25	1 x 4 ... 20 mA input + 4 relays (limit/P(ID)/Chemoclean) (not with PROFIBUS DP)	
26	1 x 4 ... 20 mA input + 4 relays (limit/P(ID)/timer) (not with PROFIBUS DP)	
Marking		
1	Tagging (Tag), see additional spec.	
COM253-		complete order code
COM223-		

Additional functions of the Plus package

- Current output table to cover large areas with varying resolution, fields O23x
- Process Check System (PCS): live check of the sensor, function group P
- Automatic cleaning function start, field F8
- At version DS: air pressure measurement

Scope of delivery

The delivery of the field instrument includes:

- 1 transmitter COM253
- 1 plug-in screw terminal
- 1 cable gland Pg 7
- 1 cable gland Pg 16 reduced
- 2 cable glands Pg 13.5
- 1 Operating Instructions BA199C/07/EN
- versions with HART communication:
 - 1 Operating Instructions Field Communication with HART, BA208C/07/EN
- versions with PROFIBUS communication:
 - 1 Operating Instructions Field Communication with PROFIBUS PA/DP, BA209C/07/EN

The delivery of the panel mounted instrument includes:

- 1 transmitter COM223
- 1 set of plug-in screw terminals
- 2 tensioning screws
- 1 BNC-plug (solder-free)
- 1 Operating Instructions BA199C/07/EN
- versions with HART communication:
 - 1 Operating Instructions Field Communication with HART, BA208C/07/EN
- versions with PROFIBUS communication:
 - 1 Operating Instructions Field Communication with PROFIBUS PA/DP, BA209C/07/EN

Accessories

Sensors

Oxymax W COS31

- Oxygen sensor for drinking water and wastewater measurements, potentiostatic amperometric principle
- Material: stainless steel 1.4571 (AISI 316 Ti)
- Ordering acc. to product structure, see Technical Information TI285C/07/EN

Oxymax W COS41

- Oxygen sensor for drinking water and wastewater measurements, amperometric principle
- Material: POM
- Ordering acc. to product structure, see Technical Information TI284C/07/EN

Oxymax W COS71

- Oxygen sensor for trace measurement, potentiostatic amperometric principle
- Material: stainless steel 1.4571 (AISI 316 Ti)
- Ordering acc. to product structure, see Technical Information TI286/07/EN

Oxymax W COS61

- Optical oxygen sensor for drinking water and wastewater measurements, fluorescence quenching principle
 - Material: stainless steel 1.4571 (AISI 316 Ti)
 - Ordering acc. to product structure, see Technical Information TI387C/07/EN
-

Connection accessories

OMK measuring cable

- non-terminated measuring cable for oxygen sensors COS31, COS61 and COS71, for extension between junction box VS and transmitter
- Sold by the meter, order no. 50004124

CMK measuring cable

- non-terminated measuring cable for oxygen sensor COS41, for extension between junction box VBM and transmitter
- Sold by the meter, order no. 50005374

VS junction box

- With plug-in socket and 7-pole plug
- For cable extension from sensor (COS71, COS61, COS31, COS3 with SXP connector) to transmitter, IP 65;
- Order no. 50001054


Junction box VBM

- for cable extension for sensors COS41, COS4 (fixed cable versions)
- with 10 terminals, IP 65 / NEMA 4X
- Order numbers:
 - Cable entry Pg 13.5: 50003987
 - Cable entry NPT 1/2": 51500177

Mounting accessories

CYY101 weather protection cover for field devices, absolutely essential if operating the unit outdoors

- Material: stainless steel 1.4031 (AISI 304)
- Order No. CYY101-A

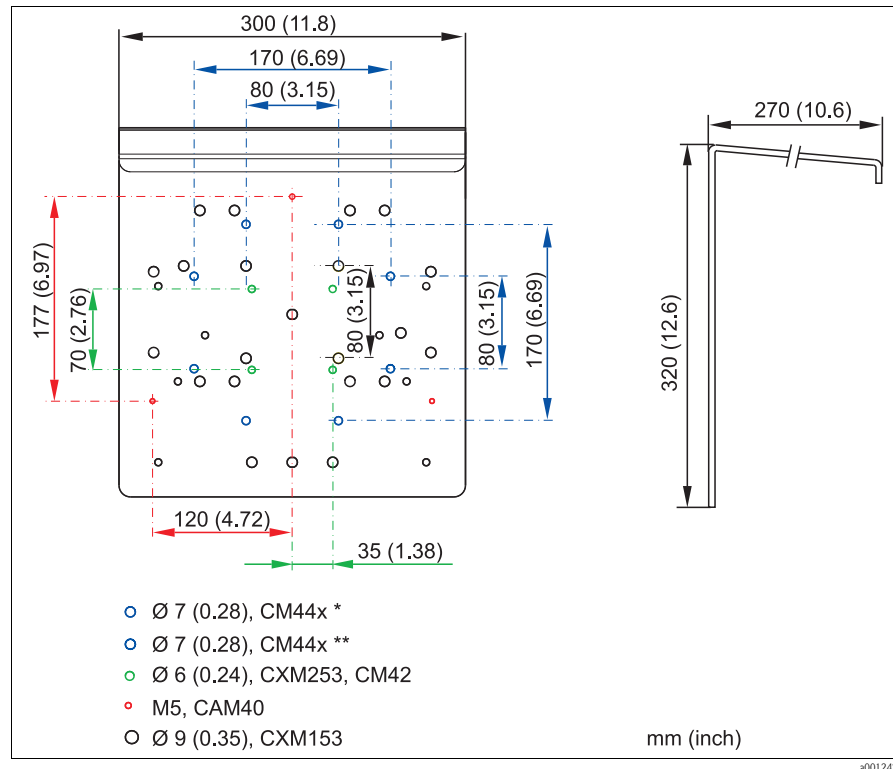


Weather protection cover for field devices

- * Wall and post mounting
- ** Rail mounting

Post mounting kit


- For mounting of field housing on horizontal or vertical pipes (Ø max. 60 mm (2.36"))
- Material: stainless steel 1.4301
- order no. 50086842

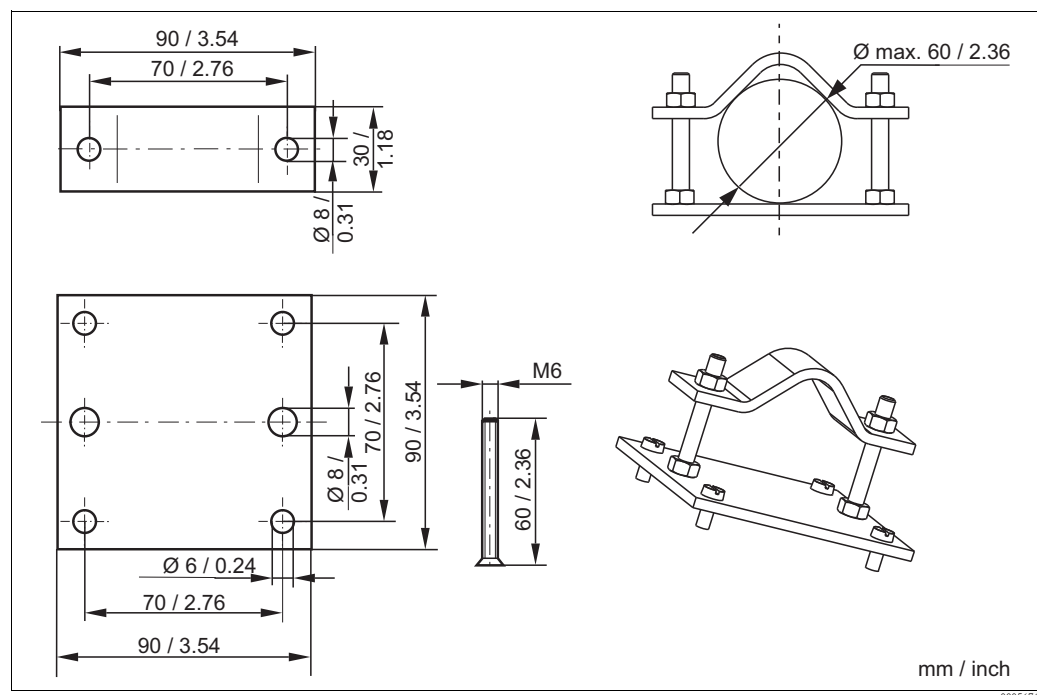

Post mounting kit

CYY102 universal post

- Square pipe for mounting transmitters
- Material: stainless steel 1.4301 (AISI 304)
- Order No. CYY102-A

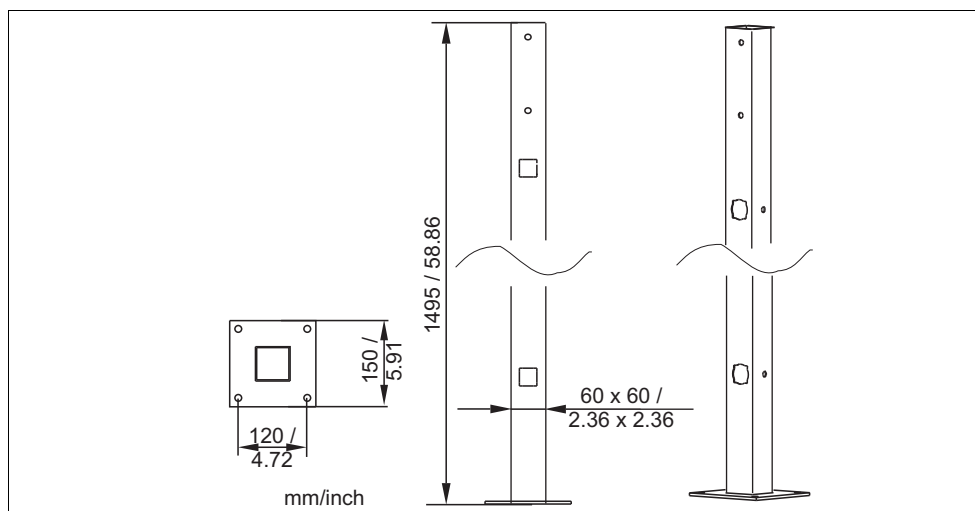

Universal post

a0005742

Optoscope

Optoscope

- Interface between transmitter and PC / laptop for service purposes.
- The Windows software "Scopeware" required for the PC or laptop is supplied with the Optoscope. The Optoscope is supplied in a sturdy plastic case with all the accessories required.
- Order no. 51500650

For more Endress+Hauser product please visit: www.ainstru.com

Mail: Sales@ainstru.com

Instruments International

Endress+Hauser
Instruments International AG
Kaegenstrasse 2
4153 Reinach
Switzerland

Tel.+41 61 715 81 00
Fax+41 61 715 25 00
www.endress.com
info@ii.endress.com

Endress+Hauser 
People for Process Automation