

Technical Information

CYA680

Flow Assembly for the Life Sciences and Chemical Industry



Application

- For 12 mm sensors with Pg 13.5
- Installations with small pipe diameters
- Hygienic and sterile applications
- Chromatography
- Filtrations
- Reverse osmosis

Your benefits


- Maximum product yield thanks to fast measured values in the smallest of sample volumes
- High level of product safety:
Flow assembly is perfectly suitable for CIP and SIP.
- The PVDF-version is resistant to aggressive and corrosive media
- Complies with the requirements of the Life Sciences industry:
Certified biocompatibility in relation to biological reactivity in accordance with USP <87> and USP <88>, FDA-listed seals and hygienic, electropolished surfaces ($Ra \leq 0.38 \mu m$)

Function and system design

Measuring system

A complete measuring system comprises:

- Transmitter, for example Liquiline CM44P
- One or two 12 mm sensors, e.g. CLS82D and / or CPS71D
- Flow assembly CYA680
- Measuring cable, for example CYK10

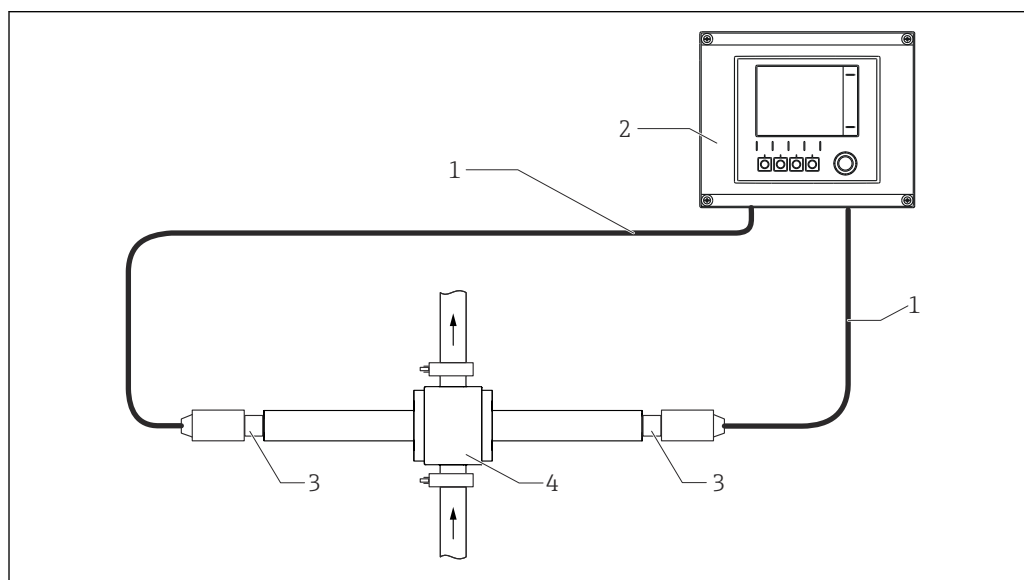

A0029448

1 Example of a measuring system

- 1 Measuring cable
- 2 Liquiline CM44P transmitter
- 3 Sensors
- 4 Flow assembly CYA680

Mounting

Installation instructions

Flow assembly CYA680 is available in various nominal diameters and materials.
It can be installed both in horizontal and vertical pipes.



Orientation

Please follow the installation instructions for the sensors used!
If the Ceragel CPS71D is installed vertically, use electrode version TU for upside-down installation.

Process

Process temperature and pressure range

Process temperature and pressure range depend on the material and nominal diameter.


Process connection	Nominal diameter	Nominal pressure	Temperature
316L Tri-Clamp 1.4435 Tri-Clamp	0.25 to 2"	16 bar (230 psi)	0 to 130 °C (32 to 266 °F)
PVDF Tri-Clamp (Kynar)	0.25", 0.5", 0.75"	4 bar (58 psi)	0 to 130 °C (32 to 266 °F)



Please observe the maximum permitted process temperature and process pressure of the sensor.

Mechanical construction

Dimensions

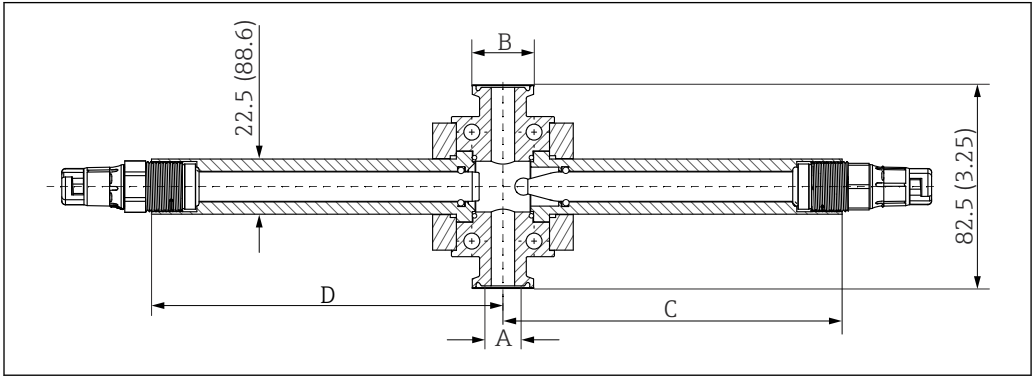

2 Dimensions in mm (inch)
A Internal diameter
B Flange diameter
C Sensor holder pH
D Sensor holder conductivity

Flange	A	B	C	D
¼" Tri-Clamp	4.57 mm (0.18")	25 mm (0.984")	138.4 mm (5.45")	143.4 mm (5.65")
½" Tri-Clamp	9.53 mm (0.375")	25 mm (0.984")	138.4 mm (5.45")	143.4 mm (5.65")
¾" Tri-Clamp	15.24 mm (0.60")	25 mm (0.984")	138.4 mm (5.45")	143.4 mm (5.65")
1" Tri-Clamp	22.1 mm (0.87")	50.39 mm (1.984")	144 mm (5.67")	149 mm (5.87")
1 ½" Tri-Clamp	34.44 mm (1.356")	50.39 mm (1.984")	144 mm (5.67")	149 mm (5.87")
2" Tri-Clamp	45 mm (1.856")	63.91 mm (2.516")	150 mm (5.92")	155 mm (6.10")

Materials

Flow assembly: Stainless steel 1.4404/1.4435
PVDF
O-rings: EPDM FDA, KALREZ FDA, VITON FDA
PVDF is not suitable for all hazardous areas.

Weight

Weight of the stainless steel version (examples):

Flange	1 Sensor location	2 Sensor locations
¼" Tri-Clamp	Approx. 1.30 kg (2.86 lbs)	Approx. 1.65 kg (3.64 lbs)
2" Tri-Clamp	Approx. 2.20 kg (4.85 lbs)	Approx. 2.55 kg (5.63 lbs)

Ordering information

Product page www.endress.com/cya680

Product Configurator

1. **Configure:** Click this button on the product page.
 2. Select **Extended selection**.
 - ↳ The Configurator opens in a separate window.
 3. Configure the device according to your requirements by selecting the desired option for each feature.
 - ↳ In this way, you receive a valid and complete order code for the device.
 4. **Accept:** Add the configured product to the shopping cart.
-  For many products, you also have the option of downloading CAD or 2D drawings of the selected product version.
5. **CAD:** Open this tab.
 - ↳ The drawing window is displayed. You have a choice between different views. You can download these in selectable formats.

Scope of delivery

The scope of delivery comprises:

- Assembly in the version ordered
- Operating Instructions

Accessories

The following are the most important accessories available at the time this documentation was issued.

Listed accessories are technically compatible with the product in the instructions.

1. Application-specific restrictions of the product combination are possible.
Ensure conformity of the measuring point to the application. This is the responsibility of the operator of the measuring point.
2. Pay attention to the information in the instructions for all products, particularly the technical data.
3. For accessories not listed here, please contact your Service or Sales Center.

pH sensors

Memosens CPS61E

- pH sensor for bioreactors in life sciences and for the food industry
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps61e



Technical Information TI01566C

Ceragel CPS71

- pH electrode with reference system including ion trap
- Product Configurator on the product page: www.endress.com/cps71



Technical Information TI00245C

Memosens CPS71E

- pH sensor for chemical process applications
- With ion trap for poison-resistant reference
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps71e



Technical Information TI01496C

ORP sensors

Memosens CPS62E

- ORP sensor for hygienic and sterile applications
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps62e



Technical Information TI01604C

pH-ISFET sensors

Memosens CPS47E

- ISFET sensor for pH measurement
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps47e



Technical Information TI01616C

Memosens CPS77E

- Sterilizable and autoclavable ISFET sensor for pH measurement
- Digital with Memosens 2.0 technology
- Product Configurator on the product page: www.endress.com/cps77e



Technical Information TI01396

Conductivity sensors

Memosens CLS82E

- Four-electrode sensor
- With Memosens technology
- Product Configurator on the product page: www.endress.com/cls82e



Technical Information TI01529C



www.addresses.endress.com

For more Endress+Hauser product please visit: www.ainstru.com
Mail: Sales@ainstru.com