

# Technical Information

## iTHERM ModuLine TM402

### Hygienic modular thermometer

Imperial, direct-contact RTD basic thermometer for hygienic applications



#### Applications

- Specially designed for use in hygienic and aseptic applications in the Food & Beverages and Life Sciences industries
- Measuring range: -50 to +200 °C (-58 to +392 °F)
- Pressure range up to 40 bar (580 psi)
- Protection class: up to IP69K
- Can be used in non-hazardous areas

#### Your benefits

- Excellent price-performance ratio and fast delivery time
- User-friendly and reliable from product selection to maintenance
- International certification: hygiene standards as per 3-A®, EHEDG, ASME BPE, FDA, TSE Certificate of Suitability
- Wide range of process connections
- Meets PMO requirements as a recording thermometer by US FDA for dairies

## Table of contents

|                                               |           |                                                        |           |
|-----------------------------------------------|-----------|--------------------------------------------------------|-----------|
| <b>Function and system design</b> . . . . .   | <b>3</b>  | <b>Certificates and approvals</b> . . . . .            | <b>22</b> |
| Notes on selecting the right device . . . . . | 3         | Hygiene standard . . . . .                             | 23        |
| Measuring principle . . . . .                 | 3         | Materials in contact with food/product (FCM) . . . . . | 23        |
| Measuring system . . . . .                    | 4         | Other standards and guidelines . . . . .               | 23        |
| <b>Input</b> . . . . .                        | <b>5</b>  | Material resistance . . . . .                          | 23        |
| Measured variable . . . . .                   | 5         | Surface purity . . . . .                               | 23        |
| Measuring range . . . . .                     | 5         | <b>Ordering information</b> . . . . .                  | <b>23</b> |
| <b>Output</b> . . . . .                       | <b>5</b>  | <b>Accessories</b> . . . . .                           | <b>24</b> |
| Output signal . . . . .                       | 5         | Device-specific accessories . . . . .                  | 24        |
| Family of temperature transmitters . . . . .  | 5         | Service-specific accessories . . . . .                 | 24        |
| <b>Wiring</b> . . . . .                       | <b>6</b>  | System components . . . . .                            | 25        |
| Wiring diagrams . . . . .                     | 6         | <b>Documentation</b> . . . . .                         | <b>25</b> |
| Cable entries . . . . .                       | 7         |                                                        |           |
| Connectors . . . . .                          | 7         |                                                        |           |
| Overvoltage protection . . . . .              | 8         |                                                        |           |
| <b>Performance characteristics</b> . . . . .  | <b>8</b>  |                                                        |           |
| Reference operating conditions . . . . .      | 8         |                                                        |           |
| Maximum measured error . . . . .              | 9         |                                                        |           |
| Ambient temperature effect . . . . .          | 9         |                                                        |           |
| Self-heating . . . . .                        | 9         |                                                        |           |
| Response time . . . . .                       | 10        |                                                        |           |
| Calibration . . . . .                         | 11        |                                                        |           |
| Insulation resistance . . . . .               | 11        |                                                        |           |
| <b>Installation</b> . . . . .                 | <b>11</b> |                                                        |           |
| Orientation . . . . .                         | 11        |                                                        |           |
| Installation instructions . . . . .           | 11        |                                                        |           |
| <b>Environment</b> . . . . .                  | <b>14</b> |                                                        |           |
| Ambient temperature range . . . . .           | 14        |                                                        |           |
| Storage temperature . . . . .                 | 14        |                                                        |           |
| Humidity . . . . .                            | 14        |                                                        |           |
| Climate class . . . . .                       | 14        |                                                        |           |
| Degree of protection . . . . .                | 14        |                                                        |           |
| Shock and vibration resistance . . . . .      | 14        |                                                        |           |
| Electromagnetic compatibility (EMC) . . . . . | 15        |                                                        |           |
| <b>Process</b> . . . . .                      | <b>15</b> |                                                        |           |
| Process temperature range . . . . .           | 15        |                                                        |           |
| Thermal shock . . . . .                       | 15        |                                                        |           |
| Process pressure range . . . . .              | 15        |                                                        |           |
| State of aggregation of the medium . . . . .  | 16        |                                                        |           |
| <b>Mechanical construction</b> . . . . .      | <b>16</b> |                                                        |           |
| Design, dimensions . . . . .                  | 16        |                                                        |           |
| Weight . . . . .                              | 17        |                                                        |           |
| Material . . . . .                            | 17        |                                                        |           |
| Surface roughness . . . . .                   | 18        |                                                        |           |
| Terminal heads . . . . .                      | 18        |                                                        |           |
| Process connections . . . . .                 | 20        |                                                        |           |
| Shape of tip . . . . .                        | 22        |                                                        |           |

## Function and system design

### Notes on selecting the right device



#### iTHERM ModuLine, hygienic

This device is part of the product line of modular thermometers for hygienic and aseptic applications.



#### Differentiating factors when selecting a suitable thermometer

| iTHERM ModuLine TM4x1 | iTHERM ModuLine TM4x2 |
|-----------------------|-----------------------|
| Metric version        | Imperial version      |

TM41x characterizes the device that uses cutting-edge technology, with features such as a replaceable insert, quick-fastening extension neck (iTHERM QuickNeck), vibration-resistant and fast-response sensor technology (iTHERM StrongSens and QuickSens) and approval for use in hazardous areas

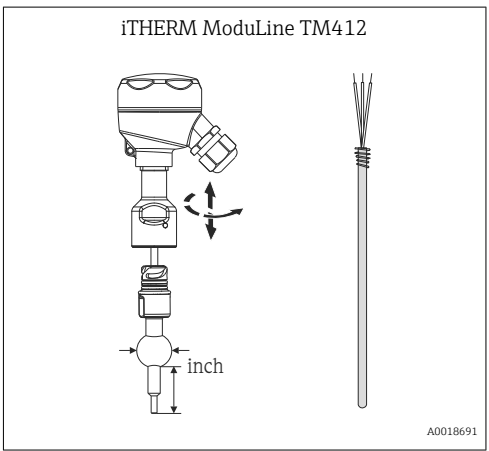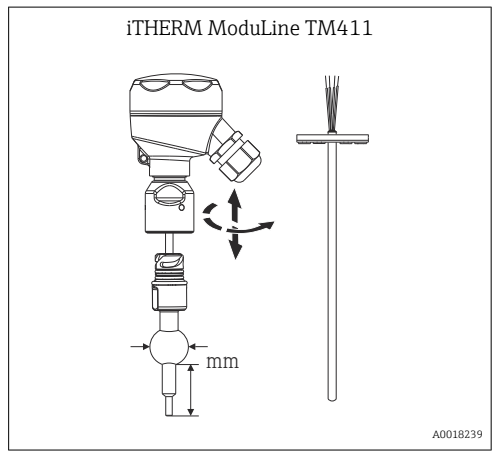

TM40x characterizes the device that uses basic technology, with features such as a fixed, non-replaceable insert, application in non-hazardous areas, standard extension neck, low-cost unit

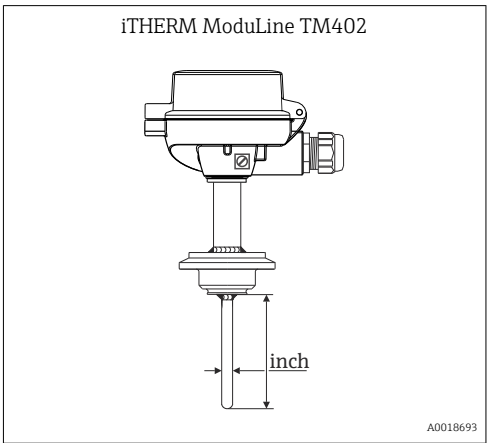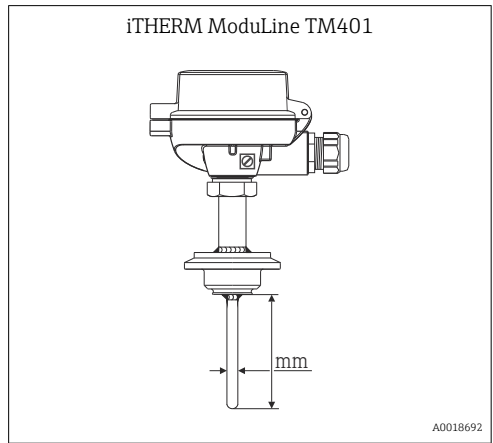

### Measuring principle

#### RTD assembly

These RTD assemblies use a Pt100 temperature sensor according to IEC 60751. The temperature sensor is a temperature-sensitive platinum resistor with a resistance of 100  $\Omega$  at 0  $^{\circ}\text{C}$  (32  $^{\circ}\text{F}$ ) and a temperature coefficient  $\alpha = 0.003851\text{ }^{\circ}\text{C}^{-1}$ .

There are generally two different kinds of platinum RTD assemblies:


- **Wire wound (WW):** Here, a double coil of fine, high-purity platinum wire is located in a ceramic support. This is then sealed top and bottom with a ceramic protective layer. Such RTD assemblies not only facilitate very reproducible measurements but also offer good long-term stability of the resistance/temperature characteristic within temperature ranges up to 600 °C (1 112 °F). This type of sensor is relatively large in size and it is comparatively sensitive to vibrations.
- **Thin-film platinum resistance thermometers (TF):** A very thin, ultrapure platinum layer, approx. 1 µm thick, is vaporized in a vacuum on a ceramic substrate and then structured photolithographically. The platinum conductor paths formed in this way create the measuring resistance. Additional covering and passivation layers are applied and reliably protect the thin platinum layer from contamination and oxidation, even at high temperatures.

The primary advantages of thin film temperature sensors over wire wound versions are their smaller sizes and better vibration resistance. A relatively low principle-based deviation of the resistance/temperature characteristic from the standard characteristic of IEC 60751 can frequently be observed among TF sensors at high temperatures. As a result, the tight limit values of tolerance class A as per IEC 60751 can only be observed with TF sensors at temperatures up to approx. 300 °C (572 °F).

### Measuring system

The manufacturer provides a complete portfolio of optimized components for the temperature measuring point – everything you need for the seamless integration of the measuring point into the overall facility. In the case of iTHERM hygienic thermometers, this includes:

- Process indicator
- Data Manager

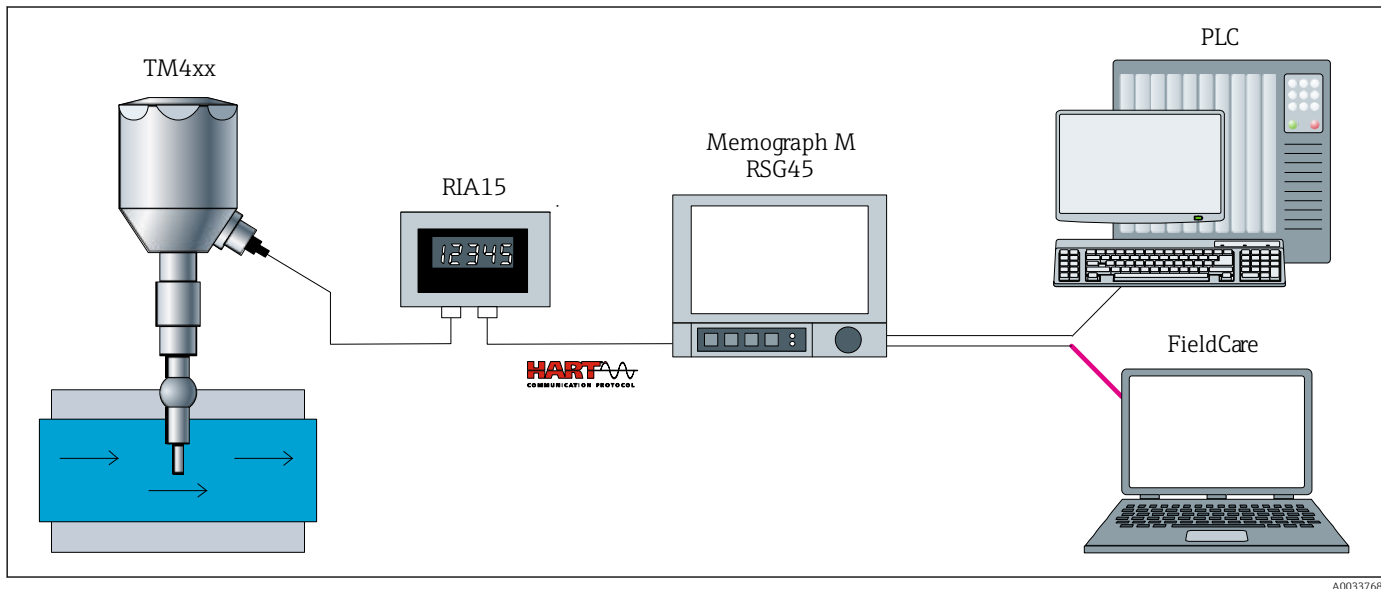

1 Example of application, measuring point layout with additional Endress+Hauser components

- Installed iTHERM thermometer with HART® head transmitter
- Process indicators from the RIA product family:
  - Display of 4 to 20 mA measured values or HART® process variables
  - 2-wire device
  - Voltage drop ≤1 V (HART® ≤1.9 V)
- Data Manager of the RSG product family:
  - Tamper-proof data storage and access (FDA 21 CFR 11)
  - HART® gateway functionality; up to 40 HART® devices connected at a time
  - Communication capabilities: Modbus, Profibus DP, PROFINET, EtherNet/IP
- PLC/FieldCare: Field Data Manager Software MS20 – Automatic service for report generation, printing reports, read out of data, storing of data, secure export, PDF generation. Read out measured data via online interface or from mass storage. Online visualization of instantaneous values ("live data").

## Input

| <b>Measured variable</b>        | Temperature (temperature-linear transmission behavior) |
|---------------------------------|--------------------------------------------------------|
| <b>Measuring range</b>          | <i>Depends on the type of sensor used</i>              |
| Sensor type <sup>1)</sup>       | Measuring range                                        |
| Pt100 (WW)                      | -200 to +600 °C (-328 to +1 112 °F)                    |
| Pt100 (TF)<br>Basic             | -50 to +200 °C (-58 to +392 °F)                        |
| Pt100 (TF)<br>Standard          | -50 to +400 °C (-58 to +752 °F)                        |
| Pt100 (TF)<br>iTHERM QuickSens  | -50 to +200 °C (-58 to +392 °F)                        |
| Pt100 (TF)<br>iTHERM StrongSens | -50 to +500 °C (-58 to +932 °F)                        |
| Thermocouple TC, type J         | -40 to +750 °C (-40 to +1 382 °F)                      |
| Thermocouple TC, type K         | -40 to +1 100 °C (-40 to +2 012 °F)                    |
| Thermocouple TC, type N         |                                                        |

1) Options depend on product and configuration

## Output

|                                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Output signal</b>                      | <p>Generally, the measured value can be transmitted in one of two ways:</p> <ul style="list-style-type: none"> <li>▪ Directly-wired sensors - sensor measured values forwarded without a transmitter.</li> <li>▪ Via all common protocols by selecting an appropriate Endress+Hauser iTEMP temperature transmitter. All the transmitters listed below are mounted directly in the terminal head and wired with the sensory mechanism.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <b>Family of temperature transmitters</b> | <p>Thermometers fitted with iTEMP transmitters are an installation-ready complete solution to improve temperature measurement by significantly increasing measurement accuracy and reliability, when compared to direct wired sensors, as well as reducing both wiring and maintenance costs.</p> <p><b>4 to 20 mA head transmitters</b></p> <p>They offer a high degree of flexibility, thereby supporting universal application with low inventory storage. The iTEMP transmitters can be configured quickly and easily at a PC. Endress+Hauser offers free configuration software which can be downloaded from the Endress+Hauser Website.</p> <p><b>HART® head transmitters</b></p> <p>The iTEMP transmitter is a 2-wire device with one or two measuring inputs and one analog output. The device not only transfers converted signals from resistance thermometers and thermocouples, it also transfers resistance and voltage signals using HART® communication. Swift and easy operation, visualization and maintenance using universal configuration software like FieldCare, DeviceCare or FieldCommunicator 375/475. Integrated Bluetooth® interface for the wireless display of measured values and configuration via Endress +Hauser SmartBlue (app), optional.</p> <p><b>PROFIBUS® PA head transmitters</b></p> <p>Universally programmable iTEMP transmitter with PROFIBUS® PA communication. Conversion of various input signals into digital output signals. High measurement accuracy over the complete ambient temperature range. PROFIBUS PA functions and device-specific parameters are configured via fieldbus communication.</p> <p><b>FOUNDATION Fieldbus™ head transmitter</b></p> <p>Universally programmable iTEMP transmitter with FOUNDATION Fieldbus™ communication. Conversion of various input signals into digital output signals. High measurement accuracy over the complete ambient temperature range. All iTEMP are approved for use in all the main process control systems. The integration tests are performed in Endress+Hauser's System World'.</p> |

**Head transmitter with PROFINET® and Ethernet-APL™**

The iTEMP transmitter is a 2-wire device with two measuring inputs. The device not only transfers converted signals from resistance thermometers and thermocouples, it also transfers resistance and voltage signals using the PROFINET® protocol. Power is supplied via the 2-wire Ethernet connection according to IEEE 802.3cg 10Base-T1. The iTEMP can be installed as an intrinsically safe electrical apparatus in Zone 1 hazardous areas. The device can be used for instrumentation purposes in the terminal head form B (flat face) according to DIN EN 50446.

**Head transmitter with IO-Link®**

The iTEMP transmitter is an IO-Link® device with a measurement input and an IO-Link® interface. It offers a configurable, simple and cost-effective solution thanks to digital communication via IO-Link®. The device is mounted in a terminal head form B (flat face) as per DIN EN 5044.

**Advantages of the iTEMP transmitters:**


- Double or single sensor input (optionally for certain transmitters)
- Attachable display (optionally for certain transmitters)
- Unsurpassed reliability, accuracy and long-term stability in critical processes
- Mathematical functions
- Monitoring of the thermometer drift, sensor backup functionality, sensor diagnostic functions
- Sensor-transmitter-matching based on the Callendar van Dusen coefficients (CvD).

## Wiring

### Wiring diagrams




According to the 3-A Sanitary Standard and the EHEDG, electrical connecting cables must be smooth, corrosion-resistant and easy to clean.

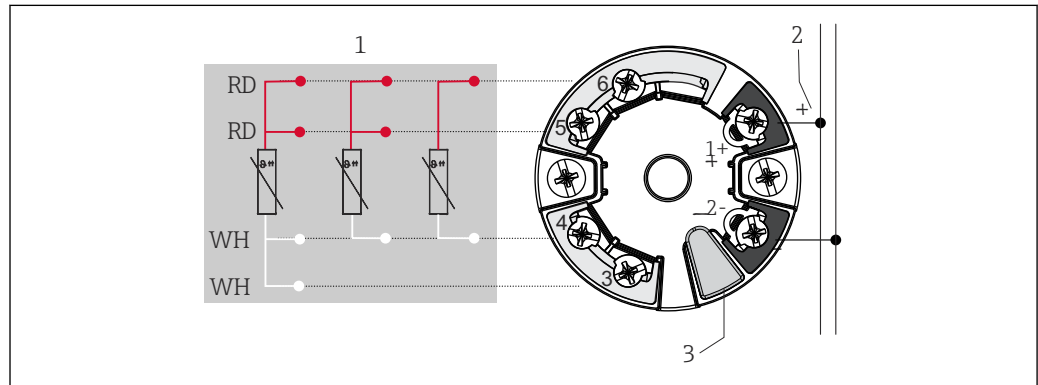

2 Head-mounted iTEMP TMT7x transmitter or iTEMP TMT31 (single sensor input)


- 1 Sensor input, RTD, 4-, 3- and 2-wire
- 2 Power supply/bus connection
- 3 Display connection/CDI interface

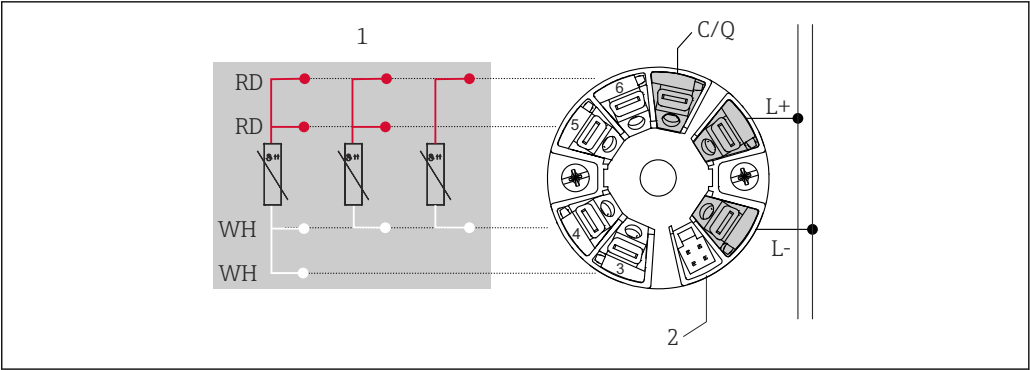

A0052495

3 Head-mounted iTEMP TMT36 transmitter (single sensor input)

- 1 RTD sensor input: 4-, 3- and 2-wire
- 2 Display connection
- L+ 18 to 30 V<sub>DC</sub> power supply
- L- 0 V<sub>DC</sub> power supply
- C/Q IO-Link or switch output

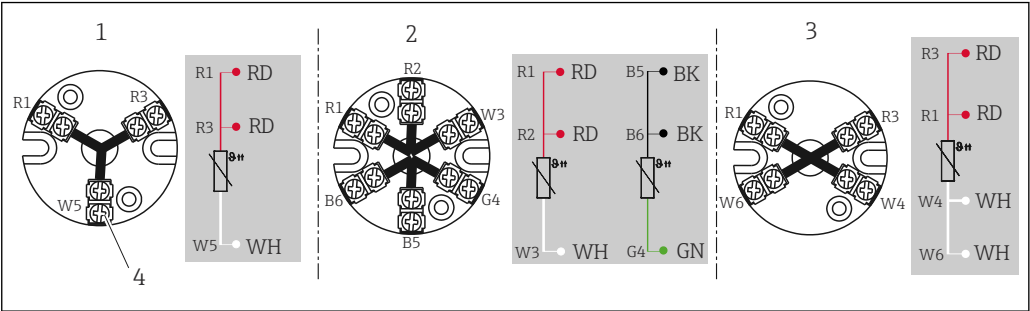

A0045627

4 Terminal block mounted

- 1 3-wire single
- 2 2 x 3-wire single
- 3 4-wire single
- 4 Outside screw

Cable entries See the 'Terminal head' section.

Connectors

Terminal head with one cable entry

| Plug                                  | 4-pin                         |   |    |    | 1x IO-Link®                   |   |   |   |
|---------------------------------------|-------------------------------|---|----|----|-------------------------------|---|---|---|
| Plug thread                           | M12                           |   |    |    |                               |   |   |   |
| PIN number                            | 1                             | 2 | 3  | 4  | 1                             | 2 | 3 | 4 |
| Electrical connection (terminal head) |                               |   |    |    |                               |   |   |   |
| Flying leads                          | Not connected (not insulated) |   |    |    | Not connected (not insulated) |   |   |   |
| 3-wire terminal block (1x Pt100)      | RD                            | i | RD | WH | Cannot be combined            |   |   |   |
| 4-wire terminal block (1x Pt100)      | Cannot be combined            |   |    |    | Cannot be combined            |   |   |   |
| 6-wire terminal block (2x Pt100)      |                               |   |    |    |                               |   |   |   |
| 1x TMT 4 to 20 mA or HART®            | Cannot be combined            |   |    |    | Cannot be combined            |   |   |   |
| 1x TMT PROFIBUS® PA                   | Cannot be combined            |   |    |    | Cannot be combined            |   |   |   |
| 1x TMT FF                             | Cannot be combined            |   |    |    | Cannot be combined            |   |   |   |
| 1x TMT PROFINET®                      | Cannot be combined            |   |    |    | Cannot be combined            |   |   |   |

| Plug                        | 4-pin                                                                                                                                                                                                                   | 1x IO-Link®                                                                                                                                                                                                    |   |    |     |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---|----|-----|
| 1x TMT IO-Link®             | Cannot be combined                                                                                                                                                                                                      | L+                                                                                                                                                                                                             | - | L- | C/Q |
| PIN position and color code | <div><div><div>4</div><div>3</div><div>1</div><div>2</div></div><div>1 BN<br/>2 GNYE<br/>3 BU<br/>4 GY</div></div> <div>A0018929</div> | <div><div><div>4</div><div>3</div><div>1</div><div>2</div></div><div>1 BN<br/>3 BU<br/>4 BK</div></div> <div>A0055383</div> |   |    |     |

Abbreviations

| i                       | RD  | WH    | BN    | GNYE         | BU   | GY   |
|-------------------------|-----|-------|-------|--------------|------|------|
| Insulated <sup>1)</sup> | Red | White | Brown | Green-yellow | Blue | Gray |

1) Wires marked 'i' are not connected and are insulated with heat shrink tubes.

Overvoltage protection


To protect against overvoltage in the power supply and signal/communication cables for the thermometer electronics, the manufacturer offers the HAW562 surge arrester for DIN rail mounting and the HAW569 for field housing installation.

 For more information, see the Technical Information of the respective devices.

Performance characteristics

|                                |                                                                                                                                                               |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Reference operating conditions | This data is relevant for determining the measurement accuracy of the iTEMP transmitters used. See technical documentation of the specific iTEMP transmitter. |
|--------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|

Maximum measured error      RTD resistance thermometer as per IEC 60751:

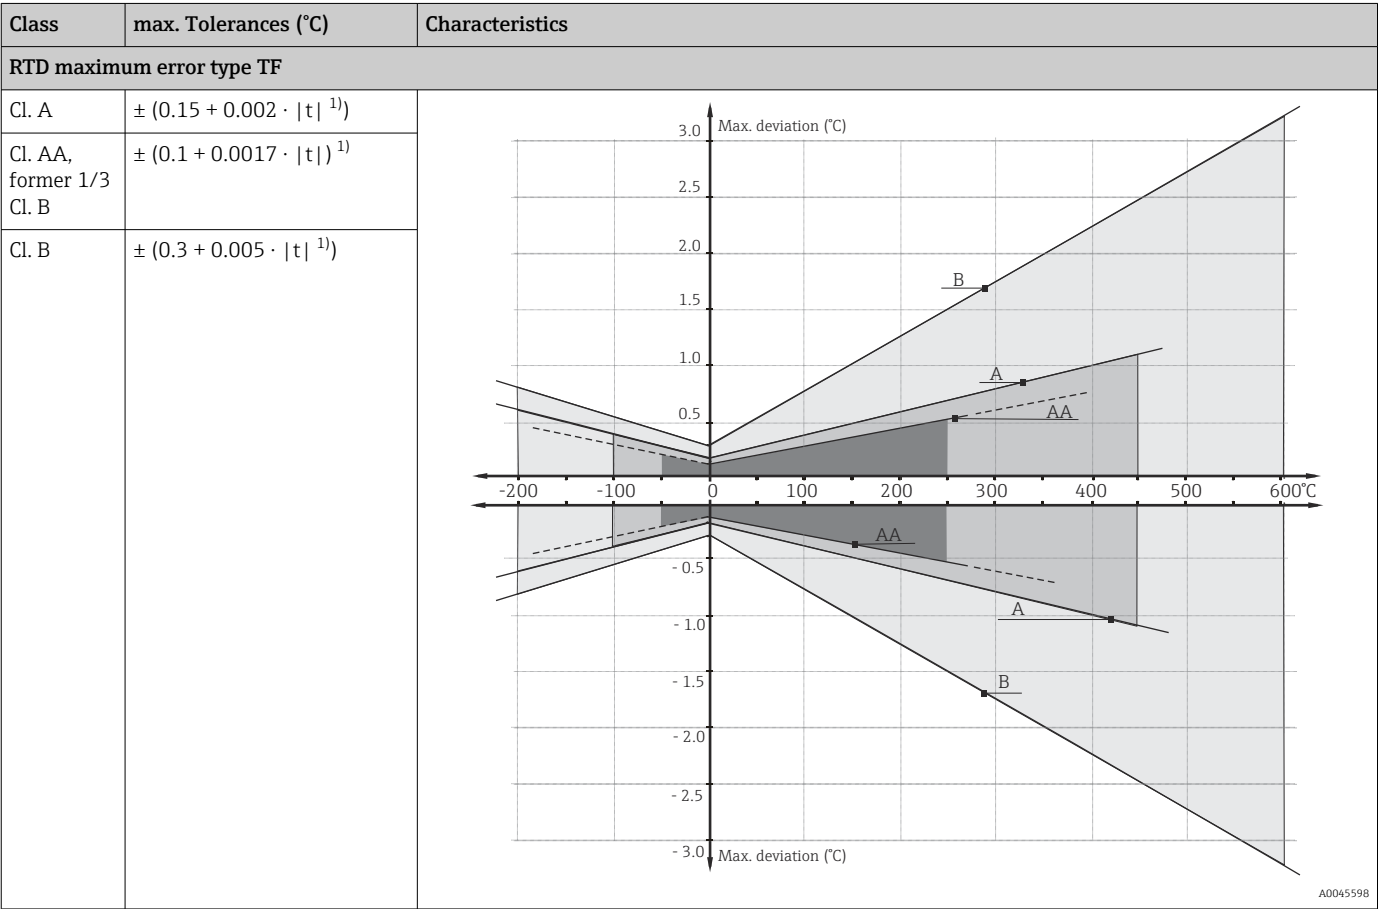

1)    |t| = absolute value °C

 For measurement errors in °F, calculate using equations in °C, then multiply the outcome by 1.8.

Temperature ranges

| Sensor type <sup>1)</sup>    | Operating temperature range           | Class B                               | Class A                              | Class AA                           |
|------------------------------|---------------------------------------|---------------------------------------|--------------------------------------|------------------------------------|
| Pt100 (TF) Basic             | -50 to +200 °C<br>(-58 to +392 °F)    | -50 to +200 °C<br>(-58 to +392 °F)    | -30 to +200 °C<br>(-22 to +392 °F)   | -                                  |
| Pt100 (TF) Standard          | -50 to +400 °C<br>(-58 to +752 °F)    | -50 to +400 °C<br>(-58 to +752 °F)    | -30 to +250 °C<br>(-22 to +482 °F)   | 0 to +150 °C<br>(32 to 302 °F)     |
| Pt100 (TF) iTHERM QuickSens  | -50 to +200 °C<br>(-58 to +392 °F)    | -50 to +200 °C<br>(-58 to +392 °F)    | -30 to +200 °C<br>(-22 to +392 °F)   | 0 to +150 °C<br>(32 to 302 °F)     |
| Pt100 (TF) iTHERM StrongSens | -50 to +500 °C<br>(-58 to +932 °F)    | -50 to +500 °C<br>(-58 to +932 °F)    | -30 to +300 °C<br>(-22 to +572 °F)   | 0 to +150 °C<br>(+32 to +302 °F)   |
| Pt100 (WW)                   | -200 to +600 °C<br>(-328 to +1112 °F) | -200 to +600 °C<br>(-328 to +1112 °F) | -100 to +450 °C<br>(-148 to +842 °F) | -50 to +250 °C<br>(-58 to +482 °F) |

1)    Selection depending on product and configuration

**Ambient temperature effect**      Depends on the head transmitter used. For details, see the Technical Information.

**Self-heating**      RTD elements are passive resistors that are measured using an external current. This measurement current causes a self-heating effect in the RTD element itself which in turn creates an additional

measurement error. In addition to the measurement current, the size of the measurement error is also affected by the temperature conductivity and flow velocity of the process. This self-heating error is negligible when an Endress+Hauser iTEMP temperature transmitter (very small measurement current) is connected.

**Response time**

Tests in water at 0.4 m/s (1.3 ft/s), according to IEC 60751; 10 K temperature step change.

| Pipe diameter   | Shape of tip                                | 1x Pt100 thin-film sensor |                 |
|-----------------|---------------------------------------------|---------------------------|-----------------|
|                 |                                             | Response time             |                 |
|                 |                                             | t <sub>50</sub>           | t <sub>90</sub> |
| Ø6.35 mm (¼ in) | Straight                                    | 5 s                       | 11 s            |
|                 | Reduced 4.76 mm (⅜ in) x 19.05 mm (0.75 in) | 3.5 s                     | 9 s             |
| Ø9.53 mm (⅜ in) | Reduced 4.76 mm (⅜ in) x 19.05 mm (0.75 in) | 5 s                       | 10.5 s          |



Response time without transmitter.

**Calibration****Calibration of thermometers**

Calibration involves comparing the measured values of a device under test (DUT) with those of a more precise calibration standard using a defined and reproducible measurement method. The aim is to determine the deviation of the DUT's measured values from the true value of the measured variable. Two different methods are used for thermometers:

- Calibration at fixed-point temperatures, e.g. at the freezing point of water at 0 °C,
- Calibration compared against a precise reference thermometer.

The thermometer to be calibrated must display the fixed point temperature or the temperature of the reference thermometer as accurately as possible. Temperature-controlled calibration baths with very homogeneous thermal values, or special calibration furnaces into which the DUT and the reference thermometer, where necessary, can project to a sufficient degree, are typically used for thermometer calibrations.

The measurement uncertainty can increase due to heat dissipation errors and short immersion lengths. The existing measurement uncertainty is listed on the individual calibration certificate.

For accredited calibrations according to ISO17025, the measurement uncertainty shouldn't be twice as high as the accredited measurement uncertainty. If this is exceeded, only a factory calibration can be performed.

For the device, Endress+Hauser offers standard calibrations at a reference temperature of -20 to +200 °C (-4 to +392 °F) based on the ITS90 (International Temperature Scale). Calibrations in other temperature ranges are available from your Endress+Hauser sales center on request. Calibrations are traceable to national and international standards. The calibration certificate is referenced to the serial number of the thermometer.

**Insulation resistance**

Insulation resistance  $\geq 100 \text{ M}\Omega$  at ambient temperature, measured between the terminals and the outer jacket with a minimum voltage of 100 V<sub>DC</sub>.

---

## Installation


**Orientation**

No restrictions. However, self-draining in the process must be guaranteed. If there is an opening to detect leaks at the process connection, this opening must be at the lowest possible point.

**Installation instructions**

The immersion length of the thermometer can influence the measurement accuracy. If the immersion length is too small, then measurement errors are caused by heat conduction via the process connection and the container wall. Therefore, if installing in a pipe, the immersion length should ideally correspond to half of the pipe diameter.

Installation options: Pipes, tanks or other plant components

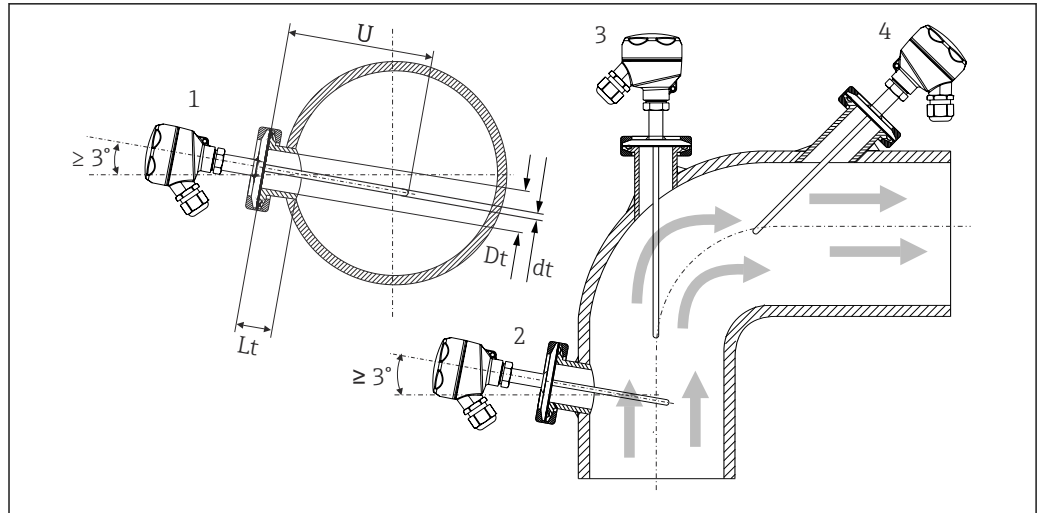

A0008946

#### 5 Installation examples

- 1, 2 Perpendicular to the flow direction, installed at a min. angle of 3° to ensure self-draining
- 3 On elbows
- 4 Inclined installation in pipes with a small nominal diameter
- U Immersion length

**i** The requirements of the EHEDG and the 3-A Sanitary Standard must be adhered to.


Installation instructions EHEDG/cleanability:  $L_t \leq (D_t - d_t)$

Installation instructions 3-A/cleanability:  $L_t \leq 2(D_t - d_t)$

**i** In the case of pipes with a small nominal diameter, it is advisable for the tip of the thermometer to project well into the process so that it extends past the pipe axis. Installation at an angle (4) could be another solution. When determining the immersion length or installation depth, all the parameters of the thermometer and of the medium to be measured must be taken into account (e.g. flow velocity, process pressure).

Pay attention to the exact position of the sensor element in the thermometer tip.

Available options depend on product and configuration.

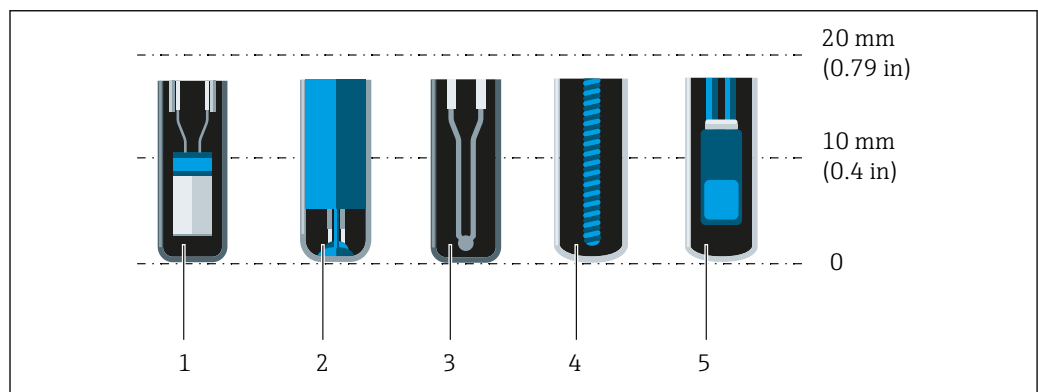

A0041814


- 1 StrongSens or TrustSens for 5 to 7 mm (0.2 to 0.28 in)
- 2 QuickSens for 0.5 to 1.5 mm (0.02 to 0.06 in)
- 3 Thermocouple (not grounded) for 3 to 5 mm (0.12 to 0.2 in)
- 4 Wire wound sensor for 5 to 20 mm (0.2 to 0.79 in)
- 5 Standard thin-film sensor for 5 to 10 mm (0.2 to 0.39 in)

To keep the influence of heat dissipation to a minimum and to achieve the best possible measurement results, 20 to 25 mm (0.79 to 0.98 in) should be in contact with the medium in addition to the actual sensor element.

This results in the following recommended minimum immersion lengths


- TrustSens or StrongSens 30 mm (1.18 in)
- QuickSens 25 mm (0.98 in)
- Wire wound sensor 45 mm (1.77 in)
- Standard thin-film sensor 35 mm (1.38 in)

It is particularly important to take this into consideration for T-pieces, as the immersion length is very short on account of their design, and the measurement error is higher as a result. It is therefore recommended to use elbow pieces with QuickSens sensors.

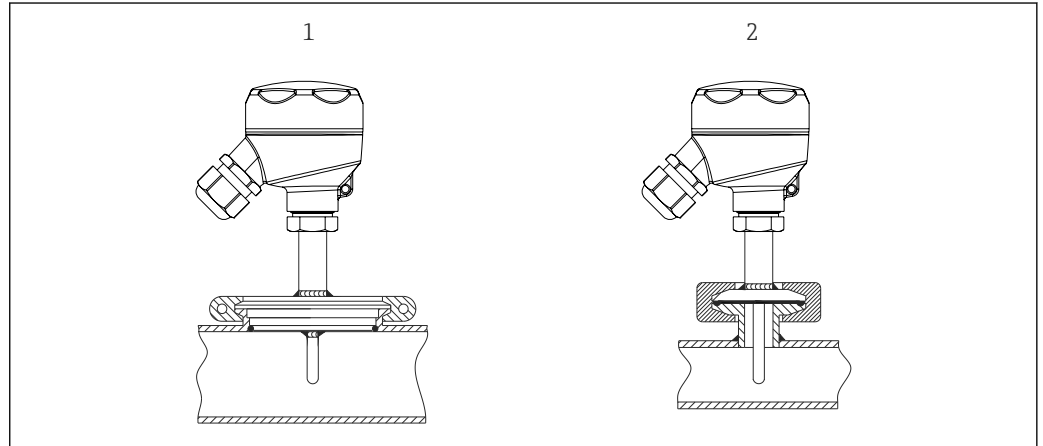

6 Process connections for thermometer installation in pipes with small nominal diameters

- 1 Varivent® process connection  $D = 50$  mm for DN25 pipes
- 2 Clamp or micro clamp

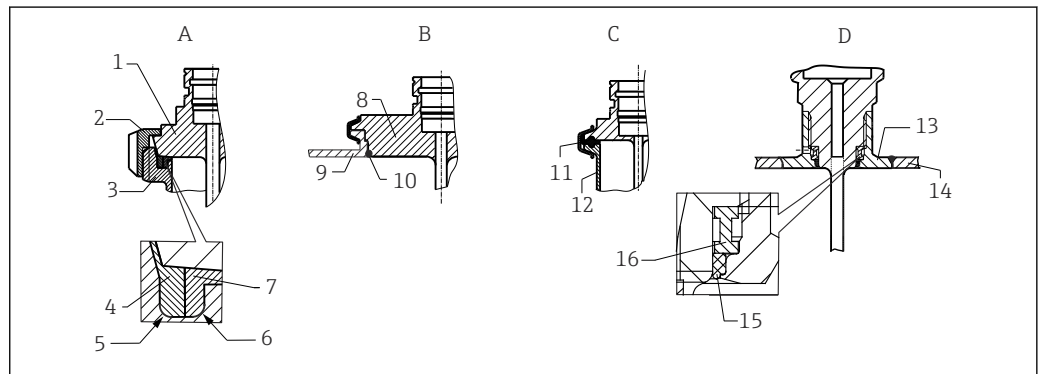

7 Detailed installation instructions for hygiene-compliant installation

- A Milk pipe connection according to DIN 11851, only in connection with EHEDG certified and self-centering sealing ring
  - 1 Sensor with milk pipe connection
  - 2 Groove slip-on nut
  - 3 Counterpart connection
  - 4 Centering ring
  - 5  $R0.4$
  - 6  $R0.4$
  - 7 Sealing ring
- B Varivent® process connection for VARINLINE® housing
  - 8 Sensor with Varivent connection
  - 9 Counterpart connection
  - 10 O-ring
- C Clamp according to ISO 2852
  - 11 Molded seal
  - 12 Counterpart connection
- D Process connection Liquiphant M G1", horizontal installation
  - 13 Weld-in adapter
  - 14 Vessel wall
  - 15 O-ring
  - 16 Thrust collar

**NOTICE**

**The following actions must be taken if a sealing ring (O-ring) or seal fails:**

- ▶ The thermometer must be removed.
- ▶ The thread and the O-ring joint/sealing surface must be cleaned.
- ▶ The sealing ring or seal must be replaced.
- ▶ CIP must be performed after installation.

In the case of weld-in connections, exercise the necessary degree of care when performing the welding work on the process side:

1. Use suitable welding material.
2. Flush-weld or weld with welding radius  $\geq 3.2$  mm (0.13 in).
3. Avoid crevices, folds or gaps.
4. Ensure the surface is honed and polished,  $R_a \leq 0.76$   $\mu\text{m}$  (30  $\mu\text{in}$ ).

Pay attention to the following when installing the thermometer to ensure that the cleanability is not affected:

1. The installed sensor is suitable for CIP (cleaning in place). Cleaning is carried out in combination with piping or tank. In the case of internal tank fixtures using process connection nozzles, it is important to ensure that the cleaning assembly directly sprays this area so that it is cleaned properly.
2. The Varivent® connections enable flush-mounted installation.

## Environment

| Ambient temperature range | Terminal head <sup>1)</sup>               | Temperature in °C (°F)                                                                                                                                                                                        |
|---------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                           | Without head transmitter installed        | Depends on the terminal head used and the cable gland or fieldbus connector, see 'Terminal heads' section.                                                                                                    |
|                           | With mounted head transmitter             | -40 to 85 °C (-40 to 185 °F)<br>SIL mode (HART 7 transmitter): -40 to 70 °C (-40 to 158 °F)                                                                                                                   |
|                           | With mounted head transmitter and display | -30 to +85 °C (-22 to +185 °F)                                                                                                                                                                                |
|                           | With mounted field transmitter            | <ul style="list-style-type: none"> <li>■ Without display: -40 to 85 °C (-40 to 185 °F)</li> <li>■ With display: -40 to +80 °C (-40 to +176 °F)</li> <li>■ SIL mode: -40 to +75 °C (-40 to +167 °F)</li> </ul> |

1) Depends on product and configuration.

|                                |                                                                                                                                                                                                                                                            |
|--------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Storage temperature            | -40 to 85 °C (-40 to 185 °F).                                                                                                                                                                                                                              |
| Humidity                       | Depending on the transmitter used. If Endress+Hauser iTEMP head transmitters are used: <ul style="list-style-type: none"> <li>■ Condensation permitted as per IEC 60 068-2-33.</li> <li>■ Maximum relative humidity: 95% as per IEC 60068-2-30.</li> </ul> |
| Climate class                  | As per EN 60654-1, Class C.                                                                                                                                                                                                                                |
| Degree of protection           | Max. IP69K, depending on the design (terminal head, connector, etc.).                                                                                                                                                                                      |
| Shock and vibration resistance | The Endress+Hauser inserts exceed the requirements of IEC 60751 with regard to shock and vibration resistance of 3g in a range of 10 to 500 Hz. The vibration resistance of the measuring point depends on sensor type and design:                         |

| Sensor type <sup>1)</sup> | Vibration resistance for the sensor tip  |
|---------------------------|------------------------------------------|
| Pt100 (WW)                | $\leq 30$ m/s <sup>2</sup> ( $\leq 3g$ ) |
| Pt100 (TF)                |                                          |
| Basic                     |                                          |

| Sensor type <sup>1)</sup>                                                     | Vibration resistance for the sensor tip      |
|-------------------------------------------------------------------------------|----------------------------------------------|
| Pt100 (TF)<br>Standard                                                        | $\leq 40 \text{ m/s}^2$ ( $\leq 4\text{g}$ ) |
| Pt100 (TF)<br>iTHERM StrongSens                                               | $600 \text{ m/s}^2$ (60g)                    |
| Pt100 (TF)<br>iTHERM QuickSens, version: $\varnothing 6 \text{ mm}$ (0.24 in) | $600 \text{ m/s}^2$ (60g)                    |
| Pt100 (TF)<br>iTHERM QuickSens, version: $\varnothing 3 \text{ mm}$ (0.12 in) | $\leq 30 \text{ m/s}^2$ ( $\leq 3\text{g}$ ) |
| Thermocouple TC, type J, K, N                                                 | $\leq 30 \text{ m/s}^2$ ( $\leq 3\text{g}$ ) |

1) Options depend on product and configuration

#### Electromagnetic compatibility (EMC)


Depends on the iTEMP head transmitter used. See the technical documentation of the specific device.

## Process

|                           |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Process temperature range | Maximum $-50$ to $+200$ °C ( $-58$ to $+392$ °F)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Thermal shock             | Thermal shock resistance in CIP/SIP process with a temperature increase from $+5$ to $+130$ °C ( $+41$ to $+266$ °F) within 2 seconds.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Process pressure range    | <p>The maximum possible process pressure depends on various influencing factors, such as the design, process connection and process temperature. For information on the maximum possible process pressures for the individual process connections, see the 'Process connection' section. →  20</p> <p> It is possible to check the mechanical loading capacity as a function of the installation and process conditions online in the Thermowell (TW) Sizing Module for thermowells in the Endress+Hauser Applicator software. See 'Accessories' section.</p> |

#### Example of the permitted flow velocity depending on the immersion length and process medium

The maximum allowable flow velocity to which the thermometer can be exposed decreases as the immersion depth of the insert in the flowing medium increases. In addition, it is dependent on the diameter of the thermometer tip, the medium type, the process temperature and the process pressure. The following figures exemplify the maximum permitted flow velocities in water and superheated steam at a process pressure of 40 bar (580 PSI).

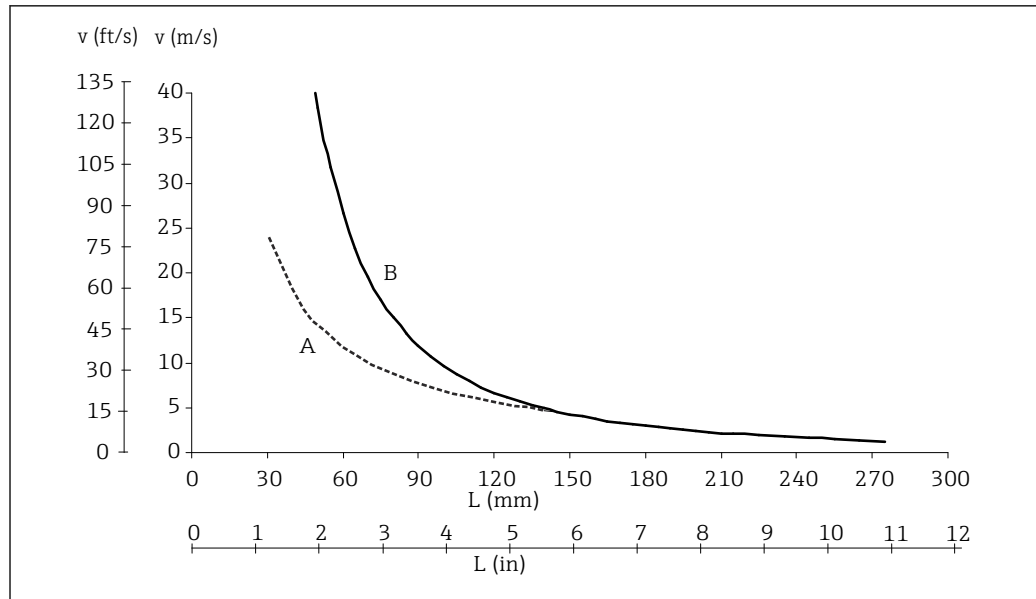

A0008065

8 Permitted flow velocity, thermowell diameter 6.35 mm (1/4 in)

A Medium water at  $T = 50\text{ °C}$  ( $122\text{ °F}$ )

B Medium superheated steam at  $T = 400\text{ °C}$  ( $752\text{ °F}$ )

L Immersion length exposed to flow

v Flow velocity


**State of aggregation of the medium**

Gaseous or liquid (also with high viscosity, e.g. yogurt).

## Mechanical construction

**Design, dimensions**

All dimensions in mm (in).

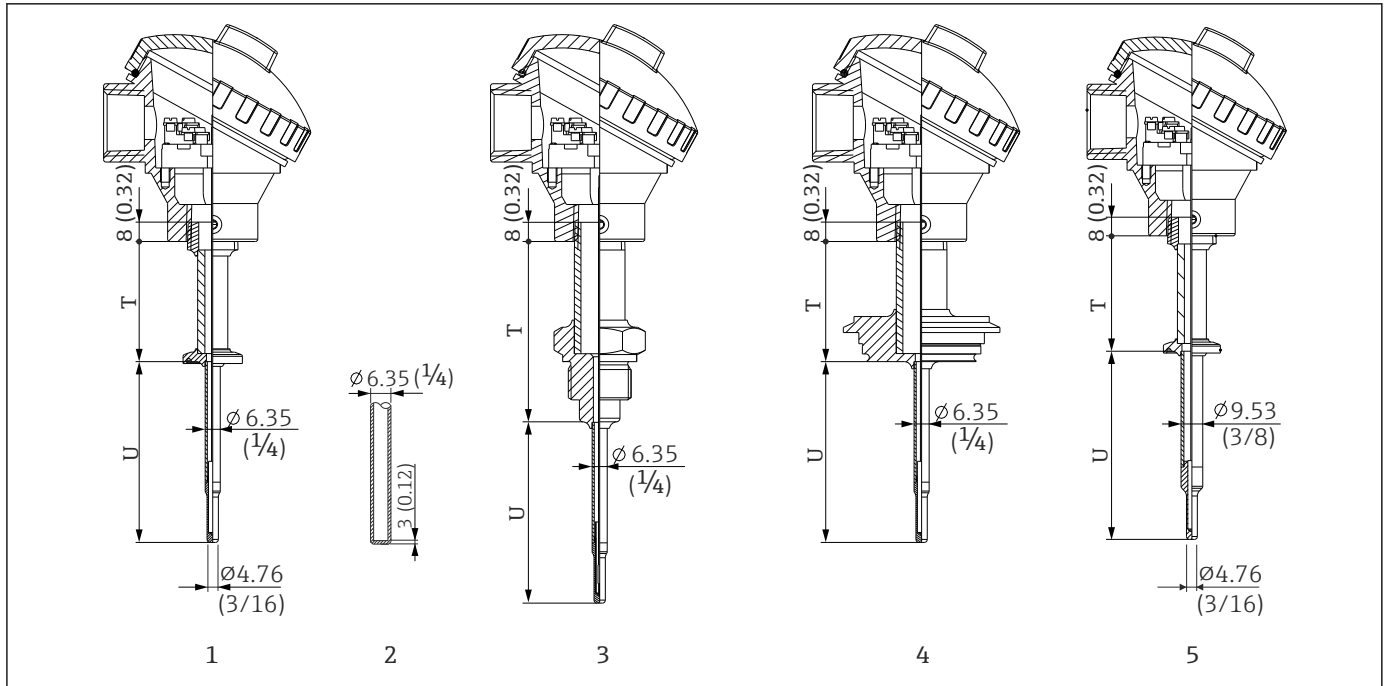

A0034462

- 1 Thermometer with clamp process connection and Ø6.35 mm (1/4 in) thermowell with reduced tip 4.76 mm (3/16 in)
  - 2 Optional for all thermometers with Ø6.35 mm (1/4 in) thermowell: straight tip shape
  - 3 Thermometer with ISO228 process connection and Ø6.35 mm (1/4 in) thermowell with reduced tip Ø4.76 mm (3/16 in)
  - 4 Thermometer with Varivent process connection and Ø6.35 mm (1/4 in) thermowell with reduced Ø4.76 mm (3/16 in)
  - 5 Thermometer with clamp process connection and Ø9.53 mm (3/8 in) thermowell with reduced tip Ø4.76 mm (3/16 in)
- T Extension neck length  
U Immersion length

## Weight

Depends on product and configuration.

## Material

The temperatures for continuous operation specified in the following table are only intended as reference values for use of the various materials in air and without any significant compressive load. The maximum operating temperatures can be reduced considerably in cases where abnormal conditions such as high mechanical load occur or in aggressive media.

| Designation | Recommended max. temperature for continuous use in air | Properties                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------|--------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AISI 316L   | 650 °C (1 202 °F) <sup>1)</sup>                        | <ul style="list-style-type: none"> <li>■ Austenitic, stainless steel</li> <li>■ High corrosion resistance in general</li> <li>■ Particularly high corrosion resistance in chlorine-based and acidic, non-oxidizing atmospheres through the addition of molybdenum (e.g. phosphoric and sulfuric acids, acetic and tartaric acids with a low concentration)</li> <li>■ Increased resistance to intergranular corrosion and pitting</li> <li>■ The wetted part from a 316L thermowell withstand a passivation process with a 3% sulphuric acid</li> <li>■ Available with 3-A marked sensors</li> </ul> |

- 1) Can be used to a limited extent up to 800 °C (1472 °F) for low compressive loads and in non-corrosive media. Contact your Endress+Hauser sales team for further information.

**Surface roughness***Values for wetted surfaces:*

|                                                       |                                                  |
|-------------------------------------------------------|--------------------------------------------------|
| Standard surface, mechanically polished <sup>1)</sup> | $R_a \leq 0.76 \mu\text{m}$ (30 $\mu\text{in}$ ) |
| Mechanically polished, buffed <sup>2)</sup>           | $R_a \leq 0.38 \mu\text{m}$ (15 $\mu\text{in}$ ) |


1) Or equivalent treatment that guarantees  $R_a$  max


2) Not compliant with ASME BPE

**Terminal heads**

All terminal heads have an internal shape and size in accordance with DIN EN 50446, Form B, and a thermometer connection with a ½" NPT thread. All dimensions in mm (in). The sample cable glands in the diagrams correspond to M20x1.5 connections with non-Ex polyamide cable glands. Specifications without head transmitter installed. For ambient temperatures with head transmitter installed, see the 'Environment' section. → 14

As a special feature, Endress+Hauser offers terminal heads with optimized terminal accessibility for easy installation and maintenance.
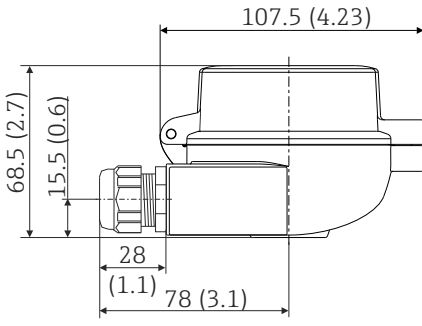
| TA30A                                                                              | Specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <ul style="list-style-type: none"> <li>Protection class: <ul style="list-style-type: none"> <li>IP66/68 (NEMA Type 4x encl.)</li> <li>For ATEX: IP66/67</li> </ul> </li> <li>Temperature: -50 to +150 °C (-58 to +302 °F) without cable gland</li> <li>Material: aluminum, polyester powder coated</li> <li>Seals: silicone</li> <li>Cable entry thread: G ½", ½" NPT and M20x1.5;</li> <li>Protective fitting connection: ½" NPT or M24x1.5</li> <li>Head color: blue, RAL 5012</li> <li>Cap color: gray, RAL 7035</li> <li>Weight: 330g (11.64 oz)</li> <li>Ground terminal, internal and external</li> <li>Available with 3-A marked sensors</li> </ul> |
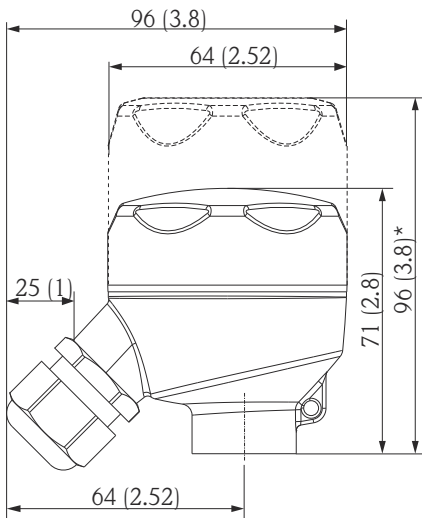
| TA30R (optionally with display window in cover)                                                                                                 | Specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  <p>* Dimensions of version with display window in cover</p> | <ul style="list-style-type: none"> <li>Degree of protection - standard version: IP69K (NEMA Type 4x encl.)</li> <li>Degree of protection - version with display window: IP66/68 (NEMA Type 4x encl.)</li> <li>Temperature: -50 to +130 °C (-58 to +266 °F) without cable gland</li> <li>Material: stainless steel 316L, abrasive-blasted or polished</li> <li>Seals: EPDM</li> <li>Display window: polycarbonate (PC)</li> <li>Cable entry thread ½" NPT and M20x1.5</li> <li>Weight <ul style="list-style-type: none"> <li>Standard version: 360 g (12.7 oz)</li> <li>Version with display window: 460 g (16.23 oz)</li> </ul> </li> <li>Display window in cover optionally for head transmitter with display TID10</li> <li>Protective fitting connection: M24x1.5 or ½" NPT</li> <li>Ground terminal: internal in standard version; external terminal optionally available</li> <li>Available with 3-A marked sensors</li> <li>Not allowed for Class II and III applications</li> </ul> |

| TA30S           | Specification                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>A0017146</p> | <ul style="list-style-type: none"> <li>■ Degree of protection: IP65 (NEMA Type 4x encl.)</li> <li>■ Temperature: -40 to +85 °C (-40 to +185 °F) without cable gland</li> <li>■ Material: polypropylene (PP), FDA-compliant, seals: O-ring EPDM</li> <li>■ Cable entry thread: 3/4" NPT (with adapter for 1/2" NPT), M20x1.5</li> <li>■ Protective assembly connection: 1/2" NPT</li> <li>■ Color: white</li> <li>■ Weight: approx. 100 g (3.5 oz)</li> <li>■ Ground terminal: only internal via auxiliary terminal</li> <li>■ Not allowed for Class II and III applications</li> <li>■ Available with 3-A marked sensors</li> </ul> |

### Cable glands and connectors <sup>1)</sup>

| Type                                                          | Suitable for cable entry                                | Degree of protection | Temperature range                  | Suitable cable diameter      |
|---------------------------------------------------------------|---------------------------------------------------------|----------------------|------------------------------------|------------------------------|
| Cable gland, polyamide blue (indication of Ex-i circuit)      | 1/2" NPT                                                | IP68                 | -30 to +95 °C<br>(-22 to +203 °F)  | 7 to 12 mm (0.27 to 0.47 in) |
| Cable gland, polyamide                                        | 1/2" NPT, 3/4" NPT, M20x1.5 (optionally 2x cable entry) | IP68                 | -40 to +100 °C<br>(-40 to +212 °F) | 5 to 9 mm (0.19 to 0.35 in)  |
|                                                               | 1/2" NPT, M20x1.5 (optionally 2x cable entry)           | IP69K                | -20 to +95 °C<br>(-4 to +203 °F)   |                              |
| Cable gland for dust ignition-proof area, polyamide           | 1/2" NPT, M20x1.5                                       | IP68                 | -20 to +95 °C<br>(-4 to +203 °F)   |                              |
| Cable gland for dust ignition-proof area, nickel-plated brass | M20x1.5                                                 | IP68 (NEMA Type 4x)  | -20 to +130 °C<br>(-4 to +266 °F)  |                              |
| M12 plug, 4-pin, 316 (PROFIBUS® PA, Ethernet-APL™, IO-Link®)  | 1/2" NPT, M20x1.5                                       | IP67                 | -40 to +105 °C<br>(-40 to +221 °F) | -                            |
| M12 plug, 8-pin, 316                                          | M20x1.5                                                 | IP67                 | -30 to +90 °C<br>(-22 to +194 °F)  | -                            |
| 7/8" plug, 4-pin, 316 (FOUNDATION™ Fieldbus, PROFIBUS® PA)    | 1/2" NPT, M20x1.5                                       | IP67                 | -40 to +105 °C<br>(-40 to +221 °F) | -                            |


1) Depending on product and configuration




Cable glands are not available for encapsulated, flameproof thermometers.


## Process connections

All dimensions in mm (in).
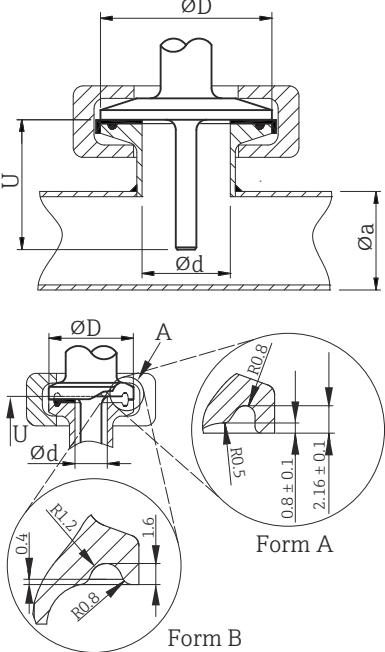
| Type                                                                                                                                                                                                                      | Type of fitting                        | Dimensions        |                                  | Technical properties                                                                                                                                                                                                           | Conformity      |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|-------------------|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------|
|                                                                                                                                                                                                                           | $\varnothing d$ : <sup>1)</sup>        | $\varnothing D$   | $\varnothing a$                  |                                                                                                                                                                                                                                |                 |
| Clamp according to ISO 2852<br><br>Form A: In compliance with ASME BPE Type A<br>Form B: In compliance with ASME BPE Type B and ISO 2852 | Tri-clamp ¾" (DN18) Form A             | 25 mm (0.98 in)   | -                                | <ul style="list-style-type: none"> <li>■ <math>P_{max.} = 16 \text{ bar (232 psi)}</math>, depends on clamp ring and suitable seal</li> <li>■ With 3-A symbol</li> </ul>                                                       | ASME BPE Type A |
|                                                                                                                                                                                                                           | Clamp ISO 2852 ½" (DN12 - 21.3) Form B | 34 mm (1.34 in)   | 16 to 25.3 mm (0.63 to 0.99 in)  |                                                                                                                                                                                                                                | ISO 2852        |
|                                                                                                                                                                                                                           | Tri-clamp 1" - 1½" (DN25 - 38) Form B  | 50.5 mm (1.99 in) | 29 to 42.4 mm (1.14 to 1.67 in)  | <ul style="list-style-type: none"> <li>■ <math>P_{max.} = 16 \text{ bar (232 psi)}</math>, depends on clamp ring and suitable seal</li> <li>■ With 3-A symbol and EHEDG certification (combined with Combifit seal)</li> </ul> | ASME BPE Type B |
|                                                                                                                                                                                                                           | Tri-clamp 2" (DN40 - 51) Form B        | 64 mm (2.52 in)   | 44.8 to 55.8 mm (1.76 to 2.2 in) |                                                                                                                                                                                                                                |                 |

1) Pipes in accordance with ISO 2037 and BS 4825 Part 1

| Type                                                                                                                                                            | Version G                   | Dimensions        |                   |           | Technical properties                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|-------------------|-------------------|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                 |                             | L1 thread length  | A                 | 1 (SW/AF) |                                                                                                                                                                                                                                                                                                                                                          |
| Thread according to ISO 228 (for Liquiphant weld-in adapter)<br><br>A0009572 | G¾" for FTL20/31/33 adapter | 16 mm (0.63 in)   | 25.5 mm (1 in)    | 32        | <ul style="list-style-type: none"> <li>■ <math>P_{max.} = 25 \text{ bar (362 psi)}</math> at max. 150 °C (302 °F)</li> <li>■ <math>P_{max.} = 40 \text{ bar (580 psi)}</math> at max. 100 °C (212 °F)</li> <li>■ For more information about hygienic compliance in conjunction with FTL31/33/50 adapters, see Technical Information TI00426F.</li> </ul> |
|                                                                                                                                                                 | G¾" for FTL50 adapter       |                   |                   |           |                                                                                                                                                                                                                                                                                                                                                          |
|                                                                                                                                                                 | G1" for FTL50 adapter       | 18.6 mm (0.73 in) | 29.5 mm (1.16 in) | 41        |                                                                                                                                                                                                                                                                                                                                                          |
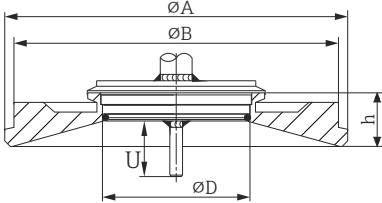
| Type                                                                                                                                                                                                                                                                                                                                                                                                                                             | Type of fitting <sup>1)</sup> | Dimensions         |                     |                     |                      | Technical properties |                                                                                                                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|--------------------|---------------------|---------------------|----------------------|----------------------|-------------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                               | φD                 | φA                  | φB                  | h                    | P <sub>max.</sub>    |                                                                                                                         |
| <div>Varivent®</div>  <div>A0021307</div>                                                                                                                                                                                                                                                                                                                       | Type B                        | 31 mm<br>(1.22 in) | 105 mm<br>(4.13 in) | -                   | 22 mm<br>(0.87 in)   | 10 bar<br>(145 psi)  | <ul style="list-style-type: none"><li>■ With 3-A symbol and EHEDG certification</li><li>■ ASME BPE compliance</li></ul> |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Type F                        | 50 mm<br>(1.97 in) | 145 mm<br>(5.71 in) | 135 mm<br>(5.31 in) | 24 mm<br>(0.95 in)   |                      |                                                                                                                         |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Type N                        | 68 mm<br>(2.67 in) | 165 mm<br>(6.5 in)  | 155 mm<br>(6.1 in)  | 24.5 mm<br>(0.96 in) |                      |                                                                                                                         |
| <div> The VARINLINE® housing connection flange is suitable for welding into the conical or torispherical head in tanks or containers with a small diameter (≤ 1.6 m (5.25 ft)) and up to a wall thickness of 8 mm (0.31 in).<br/>Varivent® Type F cannot be used for installations in pipes in combination with the VARINLINE® housing connection flange.</div> |                               |                    |                     |                     |                      |                      |                                                                                                                         |

1) Options depend on product and configuration

| Type                                                                                                  |                 |                           |                          | Technical properties                                                                                                               |  |
|-------------------------------------------------------------------------------------------------------|-----------------|---------------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------|--|
| <div>Varivent® for VARINLINE® housing for installation in pipes</div> <div></div> <div>A0009564</div> |                 |                           |                          | <div><ul style="list-style-type: none"><li>■ With 3-A symbol and EHEDG certification</li><li>■ ASME BPE compliance</li></ul></div> |  |
| Type of fitting <sup>1)</sup>                                                                         | Dimensions      |                           |                          | P <sub>max.</sub>                                                                                                                  |  |
|                                                                                                       | ØD              | Øi                        | Øa                       |                                                                                                                                    |  |
| Type N, according to DIN 11866, series A                                                              | 68 mm (2.67 in) | DN40: 38 mm (1.5 in)      | DN40: 41 mm (1.61 in)    | DN40 to DN65:<br>16 bar (232 psi)                                                                                                  |  |
|                                                                                                       |                 | DN50: 50 mm (1.97 in)     | DN50: 53 mm (2.1 in)     |                                                                                                                                    |  |
|                                                                                                       |                 | DN65: 66 mm (2.6 in)      | DN65: 70 mm (2.76 in)    |                                                                                                                                    |  |
|                                                                                                       |                 | DN80: 81 mm (3.2 in)      | DN80: 85 mm (3.35 in)    | DN80 to DN150:<br>10 bar (145 psi)                                                                                                 |  |
|                                                                                                       |                 | DN100: 100 mm (3.94 in)   | DN100: 104 mm (4.1 in)   |                                                                                                                                    |  |
|                                                                                                       |                 | DN125: 125 mm (4.92 in)   | DN125: 129 mm (5.08 in)  |                                                                                                                                    |  |
|                                                                                                       |                 | DN150: 150 mm (5.9 in)    | DN150: 154 mm (6.06 in)  |                                                                                                                                    |  |
| Type N, according to EN ISO 1127, series B                                                            | 68 mm (2.67 in) | 38.4 mm (1.51 in)         | 42.4 mm (1.67 in)        | 42.4 mm (1.67 in) to<br>60.3 mm (2.37 in):<br>16 bar (232 psi)                                                                     |  |
|                                                                                                       |                 | 44.3 mm (1.75 in)         | 48.3 mm (1.9 in)         |                                                                                                                                    |  |
|                                                                                                       |                 | 56.3 mm (2.22 in)         | 60.3 mm (2.37 in)        |                                                                                                                                    |  |
|                                                                                                       |                 | 72.1 mm (2.84 in)         | 76.1 mm (3 in)           | 76.1 mm (3 in) to<br>114.3 mm (4.5 in):<br>10 bar (145 psi)                                                                        |  |
|                                                                                                       |                 | 82.9 mm (3.26 in)         | 42.4 mm (3.5 in)         |                                                                                                                                    |  |
|                                                                                                       |                 | 108.3 mm (4.26 in)        | 114.3 mm (4.5 in)        |                                                                                                                                    |  |
| Type N, according to DIN 11866, series C                                                              | 68 mm (2.67 in) | OD 1½": 34.9 mm (1.37 in) | OD 1½": 38.1 mm (1.5 in) | OD 1½" to OD 2½":<br>16 bar (232 psi)                                                                                              |  |
|                                                                                                       |                 | OD 2": 47.2 mm (1.86 in)  | OD 2": 50.8 mm (2 in)    |                                                                                                                                    |  |
|                                                                                                       |                 | OD 2½": 60.2 mm (2.37 in) | OD 2½": 63.5 mm (2.5 in) |                                                                                                                                    |  |
| Type N, according to DIN 11866, series C                                                              | 68 mm (2.67 in) | OD 3": 73 mm (2.87 in)    | OD 3": 76.2 mm (3 in)    | OD 3" to OD 4": 10 bar (145 psi)                                                                                                   |  |


| Type                                     |                 |                          |                        | Technical properties |
|------------------------------------------|-----------------|--------------------------|------------------------|----------------------|
|                                          |                 | OD 4": 97.6 mm (3.84 in) | OD 4": 101.6 mm (4 in) |                      |
| Type F, according to DIN 11866, series C | 50 mm (1.97 in) | OD 1": 22.2 mm (0.87 in) | OD 1": 25.4 mm (1 in)  | 16 bar (232 psi)     |

1) Options depend on product and configuration

### Shape of tip

The thermal response time, the reduction of the flow cross-section and the mechanical load that occurs in the process are the criteria that matter when selecting the shape of the tip. Advantages of using reduced thermometer tips:

- A smaller tip shape has less impact on the flow characteristics of the pipe carrying the medium.
- The flow characteristics are optimized, thereby increasing the stability of the thermowell.
- Endress+Hauser offers users a range of thermowell tips to meet every requirement:
  - Straight tip
  - Reduced tip of  $\phi 4.76$  mm ( $\frac{3}{16}$  in): walls of lower thickness significantly reduce the response times of the overall measuring point
  - Reduced tip for tee and elbow thermowell with  $\phi 4.5$  mm (0.18 in)

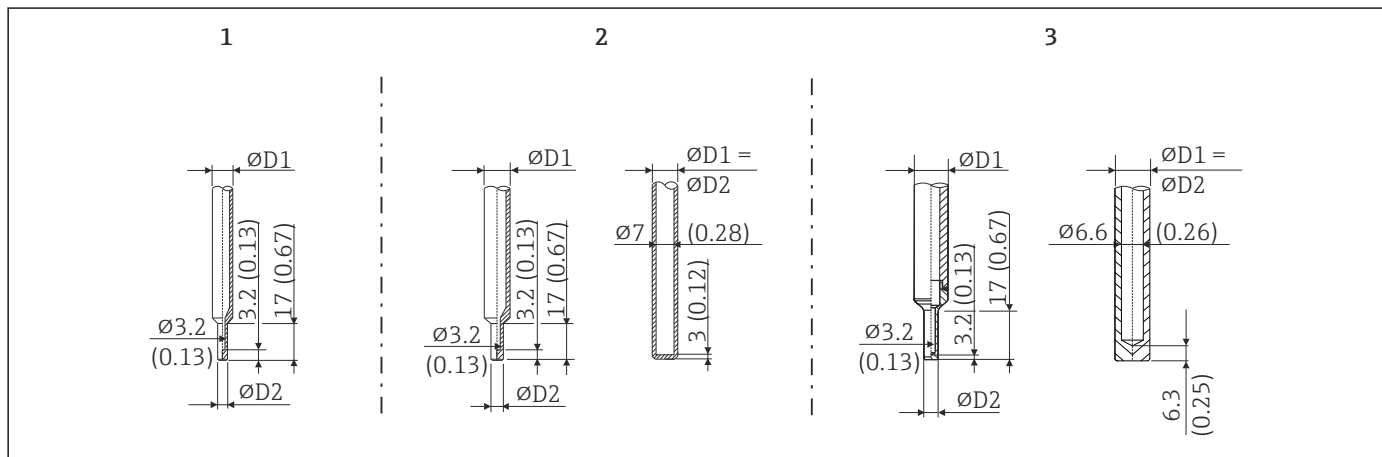

A0033991

9 Thermowell tips available (reduced or straight)

| Item no. | Thermowell ( $\phi D1$ )           | Tip ( $\phi D2$ )                                                                                                                                   | Insert ( $\phi ID$ )                                                                                                                                                      |
|----------|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1        | $\phi 6.35$ mm ( $\frac{1}{4}$ in) | Reduced tip of $\phi 4.76$ mm ( $\frac{3}{16}$ in)                                                                                                  | $\phi 3$ mm (0.12 in)                                                                                                                                                     |
| 2        | $\phi 9.53$ mm ( $\frac{3}{8}$ in) | <ul style="list-style-type: none"> <li>■ Reduced tip of <math>\phi 4.76</math> mm (<math>\frac{3}{16}</math> in)</li> <li>■ Straight tip</li> </ul> | <ul style="list-style-type: none"> <li>■ <math>\phi 3</math> mm (0.12 in)</li> <li>■ <math>\phi 6.35</math> mm (<math>\frac{1}{4}</math> in) or 6 mm (0.24 in)</li> </ul> |
| 3        | $\phi 12.7$ mm ( $\frac{1}{2}$ in) | <ul style="list-style-type: none"> <li>■ Reduced tip of <math>\phi 4.76</math> mm (<math>\frac{3}{16}</math> in)</li> <li>■ Straight tip</li> </ul> | <ul style="list-style-type: none"> <li>■ <math>\phi 3</math> mm (0.12 in)</li> <li>■ <math>\phi 6.35</math> mm (<math>\frac{1}{4}</math> in) or 6 mm (0.24 in)</li> </ul> |

**i** It is possible to check the mechanical loading capacity as a function of the installation and process conditions online in the TW Sizing Module for thermowells in the Endress+Hauser Applicator software. See 'Accessories' section. → 24

## Certificates and approvals

Current certificates and approvals for the product are available at [www.endress.com](http://www.endress.com) on the relevant product page:

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Downloads**.

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Hygiene standard</b>                             | <ul style="list-style-type: none"> <li>■ ASME BPE (latest revision), Certificate of Conformance can be ordered for designated options.</li> <li>■ 3-A Certificate Authorization number 1144, 3-A Sanitary Standard 74-07. Listed process connections.</li> <li>■ EHEDG Certificate, Type EL CLASS I. EHEDG certified/tested process connections.</li> <li>■ FDA-compliant.</li> <li>■ All process contact parts comply with the requirements of guidance EMA/410/01 Rev.3. Furthermore, no grinding and polishing agents of animal origin have been used during the entire production of the process contact parts.</li> </ul>                                                                                                                                                                                            |
| <b>Materials in contact with food/product (FCM)</b> | <p>The process contact parts (FCM) are in conformity with the following European Regulations:</p> <ul style="list-style-type: none"> <li>■ Regulation (EC) No 1935/2004, on materials and articles intended to come into contact with food, article 3, paragraph 1, article 5 and 17.</li> <li>■ Regulation (EC) No 2023/2006 on good manufacturing practice for materials and articles intended to come into contact with food.</li> <li>■ Regulation (EU) No 10/2011 on plastic materials and articles intended to come into contact with food.</li> </ul>                                                                                                                                                                                                                                                              |
| <b>Other standards and guidelines</b>               | <ul style="list-style-type: none"> <li>■ IEC 60529: Degrees of protection provided by enclosures (IP code)</li> <li>■ IEC 61010-1: Safety requirements for electrical equipment for measurement, control and laboratory use</li> <li>■ IEC 60751: Industrial platinum resistance thermometers</li> <li>■ ASTM E 1137/E1137M-2008: Standard Specification for Industrial Platinum Resistance Thermometers</li> <li>■ EN 50281-1-1: Electrical apparatus protected by enclosures</li> <li>■ DIN EN 50446: Terminal heads</li> <li>■ IEC 61326-1: Electromagnetic compatibility (electrical equipment for measurement, control and laboratory use - EMC requirements)</li> <li>■ PMO: Pasteurized Milk Ordinance 2001 Revision, U.S. Food and Drug Administration, Center for Food Safety &amp; Applied Nutrition</li> </ul> |
| <b>Material resistance</b>                          | <p>Material resistance - including resistance of housing - to the following Ecolab cleaning/disinfection agents:</p> <ul style="list-style-type: none"> <li>■ P3-topax 66</li> <li>■ P3-topactive 200</li> <li>■ P3-topactive 500</li> <li>■ P3-topactive OKTO</li> <li>■ And demineralized water</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| <b>Surface purity</b>                               | Free from oil and grease, optional.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## Ordering information

Detailed ordering information is available from your nearest sales organization [www.addresses.endress.com](http://www.addresses.endress.com) or in the Product Configurator at [www.endress.com](http://www.endress.com):

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Configuration**.



### Product Configurator - the tool for individual product configuration

- Up-to-the-minute configuration data
- Depending on the device: direct input of information specific to the measuring point, such as the measuring range or operating language
- Automatic verification of exclusion criteria
- Automatic creation of the order code and its breakdown in PDF or Excel output format
- Ability to order directly in the Endress+Hauser Online Shop

## Accessories

The accessories currently available for the product can be selected at [www.endress.com](http://www.endress.com):

1. Select the product using the filters and search field.
2. Open the product page.
3. Select **Spare parts & Accessories**.

### Device-specific accessories

#### Weld-in adapter



For more information about order codes and hygienic compliance of the adapters and spare parts, see Technical Information (TI00426F).

|                                                         |                                |                                  |                          |                           |                        |                   |
|---------------------------------------------------------|--------------------------------|----------------------------------|--------------------------|---------------------------|------------------------|-------------------|
| Weld-in adapter                                         |                                |                                  |                          |                           |                        |                   |
|                                                         | A0008246                       | A0008251                         | A0008256                 | A0011924                  | A0008248               | A0008253          |
|                                                         | G 3/4", d=29 for pipe-mounting | G 3/4", d=50 for vessel-mounting | G 3/4", d=55 with flange | G 1", d=53 without flange | G 1", d=60 with flange | G 1" adjustable   |
| Material                                                | 316L (1.4435)                  | 316L (1.4435)                    | 316L (1.4435)            | 316L (1.4435)             | 316L (1.4435)          | 316L (1.4435)     |
| Roughness $\mu\text{m}$ ( $\mu\text{in}$ ) process side | $\leq 1.5$ (59.1)              | $\leq 0.8$ (31.5)                | $\leq 0.8$ (31.5)        | $\leq 0.8$ (31.5)         | $\leq 0.8$ (31.5)      | $\leq 0.8$ (31.5) |



Maximum process pressure for the weld-in adapters:

- 25 bar (362 PSI) at maximum 150 °C (302 °F)
- 40 bar (580 PSI) at maximum 100 °C (212 °F)

### Service-specific accessories

| Accessories  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Applicator   | <p>Software for selecting and sizing Endress+Hauser devices:</p> <ul style="list-style-type: none"> <li>■ Calculation of all the necessary data for identifying the optimum device: e.g. pressure loss, accuracy or process connections.</li> <li>■ Graphic illustration of the calculation results</li> </ul> <p>Administration, documentation and access to all project-related data and parameters over the entire life cycle of a project.</p> <p>Applicator is available:<br/>Via the Internet: <a href="https://portal.endress.com/webapp/applicator">https://portal.endress.com/webapp/applicator</a></p>                                                                                                                                                                                                                                                                                                               |
| Accessories  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Configurator | <p>Product Configurator - the tool for individual product configuration</p> <ul style="list-style-type: none"> <li>■ Up-to-the-minute configuration data</li> <li>■ Depending on the device: direct input of information specific to the measuring point, such as the measuring range or operating language</li> <li>■ Automatic verification of exclusion criteria</li> <li>■ Automatic creation of the order code and its breakdown in PDF or Excel output format</li> <li>■ Ability to order directly in the Endress+Hauser Online Shop</li> </ul> <p>The Product Configurator is available on the Endress+Hauser website:<br/><a href="http://www.endress.com">www.endress.com</a> -&gt; Select your country -&gt; Click "Products" -&gt; Select the product using the filters and search field -&gt; Open product page -&gt; The "Configure" button to the right of the product image opens the Product Configurator.</p> |

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FieldCare SFE500  | <p>FDT-based plant asset management tool from Endress+Hauser. It can configure all smart field units in your system and helps you manage them. By using the status information, it is also a simple but effective way of checking their status and condition.</p> <p> For details, see Operating Instructions BA00027S and BA00065S</p>                                                                                                               |
| DeviceCare SFE100 | <p>Configuration tool for devices via fieldbus protocols and Endress+Hauser service protocols. DeviceCare is the tool developed by Endress+Hauser for the configuration of Endress+Hauser devices. All smart devices in a plant can be configured via a point-to-point or point-to-bus connection. The user-friendly menus enable transparent and intuitive access to the field devices.</p> <p> For details, see Operating Instructions BA00027S</p> |

## System components

### Process indicators from the RIA product family

Easily readable process indicators with various functions: loop-powered indicators for displaying 4 to 20 mA values, display of up to four HART variables, process indicators with control units, limit value monitoring, sensor power supply, and galvanic isolation.

Universal application thanks to international hazardous area approvals, suitable for panel mounting or field installation..

For more information, please refer to: [www.endress.com](http://www.endress.com)

### RN series active barrier

Single- or two-channel active barrier for safe separation of 0/4 to 20 mA standard signal circuits with bidirectional HART transmission. In the signal duplicator option, the input signal is transmitted to two galvanically isolated outputs. The device has one active and one passive current input; the outputs can be operated actively or passively.

For more information, please refer to: [www.endress.com](http://www.endress.com)

### Data Manager of the RSG product family

Data Managers are flexible and powerful systems to organize process values. Up to 20 universal inputs and up to 14 digital inputs for direct connection of sensors, optionally with HART, are available as an option. The measured process values are clearly presented on the display and logged safely, monitored for limit values and analyzed. The values can be forwarded via common communication protocols to higher-level systems and connected to one another via individual plant modules.

For more information, please refer to: [www.endress.com](http://www.endress.com)

## Documentation

The following document types are available in the Downloads area of the Endress+Hauser website ([www.endress.com/downloads](http://www.endress.com/downloads)), depending on the device version:

| Document type                     | Purpose and content of the document                                                                                                                                                                                                                                                                                                              |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Technical Information (TI)        | <p><b>Planning aid for your device</b></p> <p>The document contains all the technical data on the device and provides an overview of the accessories and other products that can be ordered for the device.</p>                                                                                                                                  |
| Brief Operating Instructions (KA) | <p><b>Guide that takes you quickly to the 1st measured value</b></p> <p>The Brief Operating Instructions contain all the essential information from incoming acceptance to initial commissioning.</p>                                                                                                                                            |
| Operating Instructions (BA)       | <p><b>Your reference document</b></p> <p>The Operating Instructions contain all the information that is required in various phases of the life cycle of the device: from product identification, incoming acceptance and storage, to mounting, connection, operation and commissioning through to troubleshooting, maintenance and disposal.</p> |

| Document type                                        | Purpose and content of the document                                                                                                                                                                                                                                                                                                                      |
|------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description of Device Parameters (GP)                | <b>Reference for your parameters</b><br>The document provides a detailed explanation of each individual parameter. The description is aimed at those who work with the device over the entire life cycle and perform specific configurations.                                                                                                            |
| Safety instructions (XA)                             | Depending on the approval, safety instructions for electrical equipment in hazardous areas are also supplied with the device. These are an integral part of the Operating Instructions.<br> The nameplate indicates which Safety Instructions (XA) apply to the device. |
| Supplementary device-dependent documentation (SD/FY) | Always comply strictly with the instructions in the relevant supplementary documentation. The supplementary documentation is a constituent part of the device documentation.                                                                                                                                                                             |

---



[www.addresses.endress.com](http://www.addresses.endress.com)

---

For more Endress+Hauser product please visit: [www.ainstru.com](http://www.ainstru.com)  
Mail: [Sales@ainstru.com](mailto:Sales@ainstru.com)